
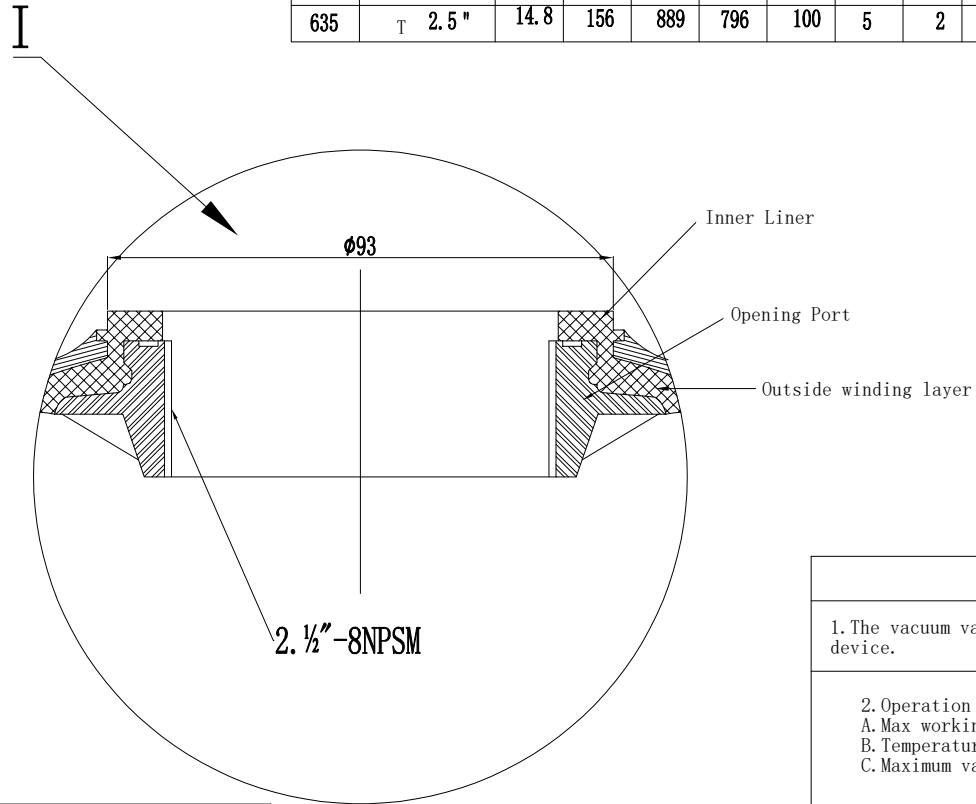


Technical Parameters												
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)								Base	Weight (kg)
			D1	H1	H2	F	WA	WLB	WB	WLA		
609	T 2.5"	2.5	156	210	127	10	5	2	5	1	none	
610	T 2.5"	3.2	156	254	161	10	5	2	5	1	none	0.9±0.1
613	T 2.5"	4.7	156	341	247	10	5	2	5	1	none	1.3±0.1
617	T 2.5"	6.5	156	432	341	50	5	2	5	1	none	1.6±0.2
618	T 2.5"	7.0	156	457	364	50	5	2	5	1	none	1.6±0.2
629	T 2.5"	12.0	156	736	643	100	5	2	5	1	none	2.1±0.2
635	T 2.5"	14.8	156	889	796	100	5	2	5	1	none	2.3±0.3

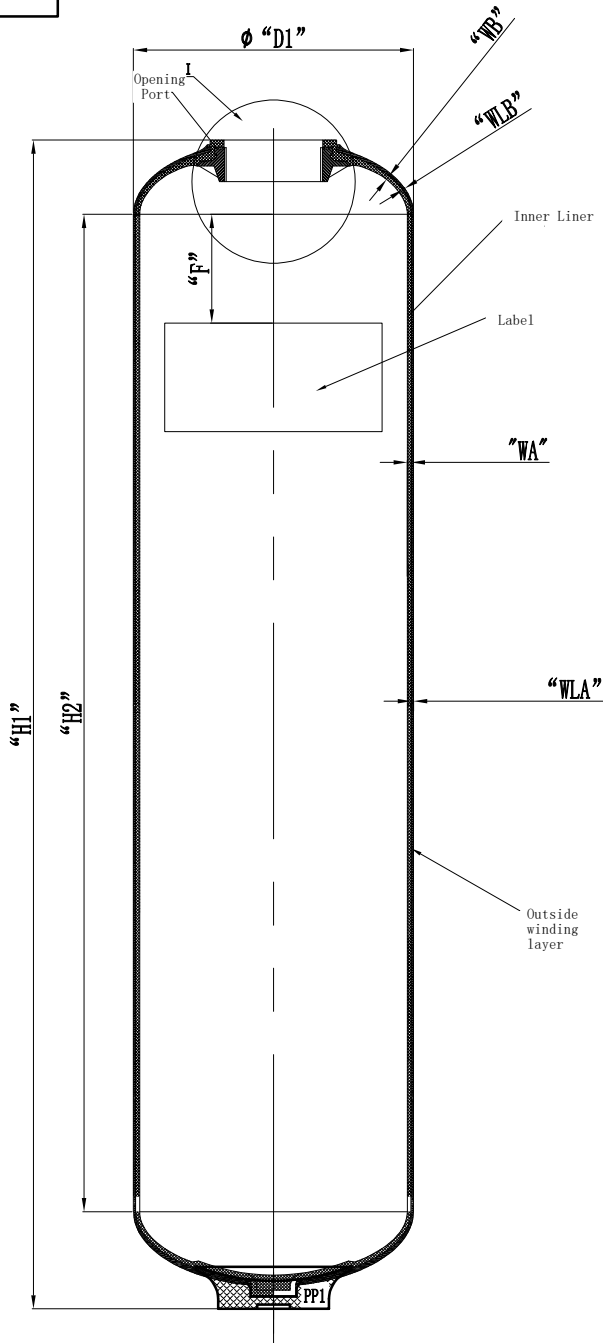

	2. 1/2" - 8NPSM internal thread
Medium Dia	2.762-2.768"
Small Dia	2.705-2.715"
Large Dia	2.843-2.849"

Remark  
 1. Product type identification see outer packaging logo.  
 2. The product color is consistent with the color of the tape packaging box.

Note

- The vacuum valve must be installed on the device.
- Operation Instructions
  - Max working pressure: 10bar(150Psi)
  - Temperature Range: 1-50°C (34-127°F)
  - Maximum vacuum: 17Kpa (5" Hg)

Sign			Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material	FRP	Projection	
Designer	Chengyang Sun	2024. 7. 16	Model	6" on 2.5"	Name: FRP tank	
Review	Jingwei Hu	2024. 7. 18	Version number: 00	Description of Change Version	Drawing No. CD-22-09-27/01	
Approve			Please don't measure the size of the drawing		Unit: mm	1 Page Page 1