
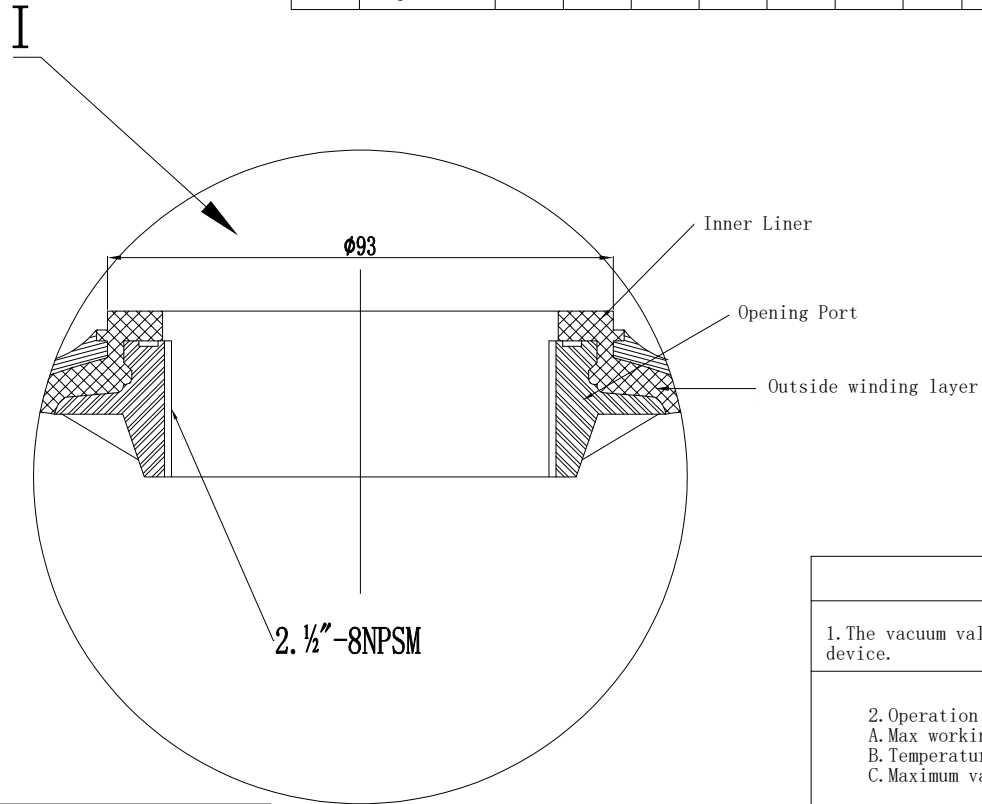


Technical Parameters												
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)								Base	Weight (kg)
			D1	H1	H2	F	WA	WLB	WB	WLA		
7×13	T 2.5"	5.9	181	330	194	10	5	2	5	1	none	1.4±0.1
7×17	T 2.5"	8.3	181	432	296	50	5	2	5	1	none	1.7±0.2
7×24	T 2.5"	12.4	181	620	475	100	5	2	5	1	none	2.1±0.2
7×30	T 2.5"	16.1	181	772	635	100	5	2	5	1	none	2.5±0.2
7×35	T 2.5"	18.8	181	889	751	100	5	2	5	1	none	2.9±0.3
7×44	T 2.5"	24.2	181	1118	983	100	5	2	5	1	none	3.3±0.3

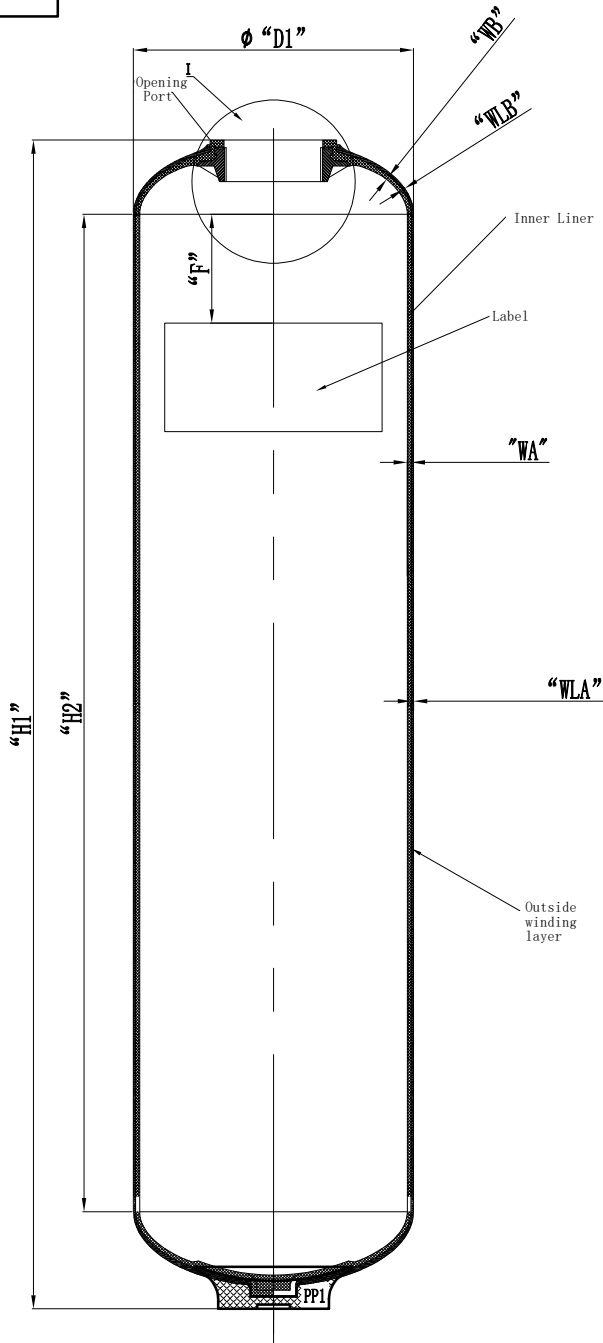

	2. 1/2"-8NPSM internal thread
Medium Dia	2.762-2.768"
Small Dia	2.705-2.715"
Large Dia	2.843-2.849"

Remark  
 1. Product type identification see outer packaging logo.  
 2. The product color is consistent with the color of the tape packaging box.

Note

- The vacuum valve must be installed on the device.
- Operation Instructions
  - A. Max working pressure: 8bar (125Psi)
  - B. Temperature Range: 1-50°C (34-127°F)
  - C. Maximum vacuum: 17Kpa (5" Hg)

Sign		Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material	FRP	Projection
Designer	Chengyang Sun	2024. 7. 16	Model	7" up and down 2.5"	Name: FRP tank
Review	Jingwei Hu	2024. 7. 18	Version number: 00	Description of Change Version	Drawing No. CD-22-09-27/01
Approve			Please don't measure the size of the drawing		Unit: mm
					1 Page Page 1