
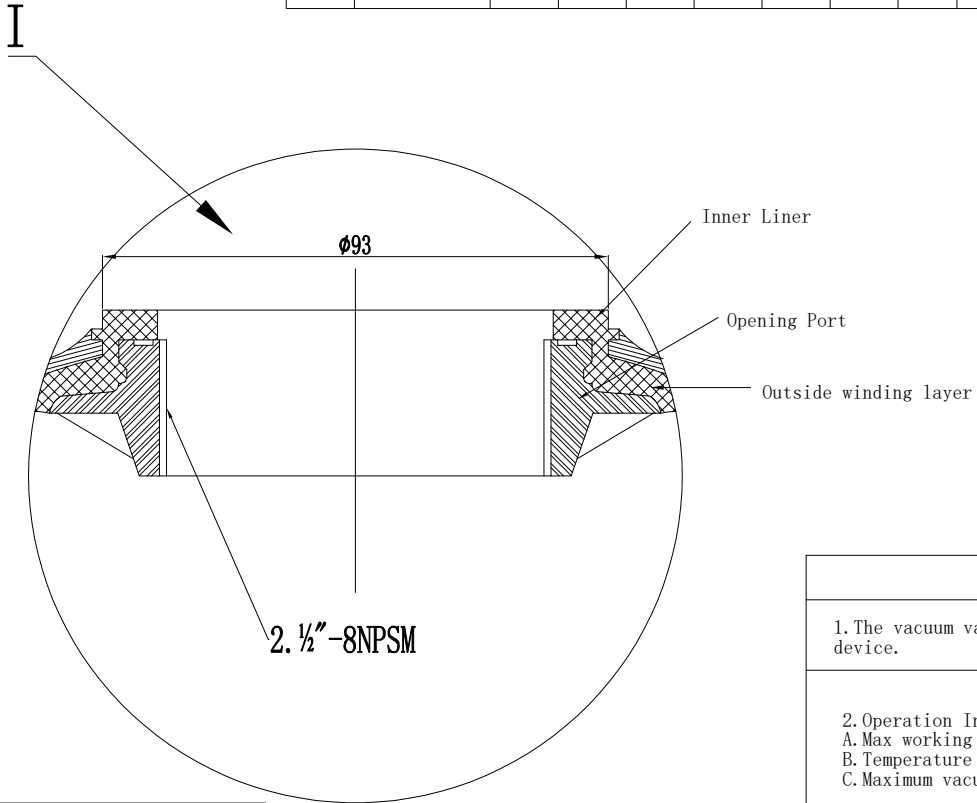


Technical Parameters												
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)								Base	Weight (kg)
			D1	H1±6	H2	F	WA	WLB	WB	WLA		
7×13	T 2.5"	5.9	181	320	194	10	5	2	5	1	none	
7×17	T 2.5"	8.3	181	422	296	50	5	2	5	1	none	
7×24	T 2.5"	12.4	181	610	475	100	5	2	5	1	none	
7×30	T 2.5"	16.1	181	762	635	100	5	2	5	1	none	
7×35	T 2.5"	18.8	181	879	751	100	5	2	5	1	none	
7×44	T 2.5"	24.2	181	1108	983	100	5	2	5	1	none	

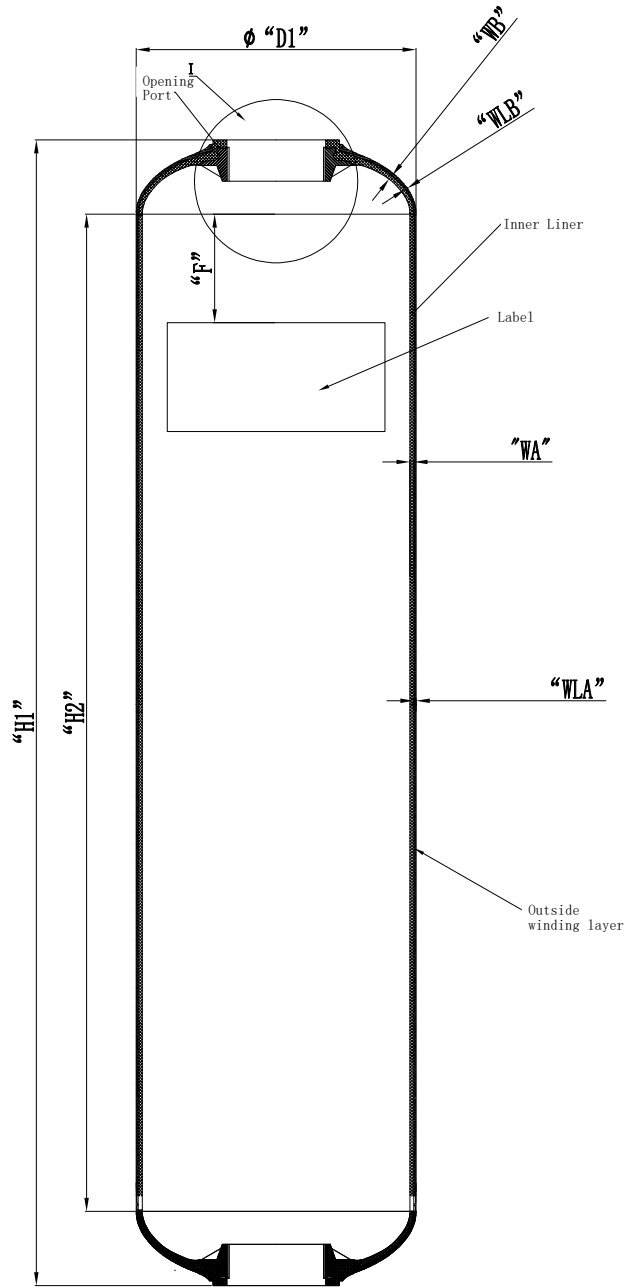

	2. 1/2"-8NPSM ^{internal thread}
Medium Dia	2.762-2.768"
Small Dia	2.705-2.715"
Large Dia	2.843-2.849"

Remark
 1. Product type identification see outer packaging logo.
 2. The product color is consistent with the color of the tape packaging box.

Note
 1. The vacuum valve must be installed on the device.
 2. Operation Instructions
 A. Max working pressure: 8bar (125Psi)
 B. Temperature Range: 1-50°C (34-127°F)
 C. Maximum vacuum: 17Kpa (5" Hg)

Sign			Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material	FRP	Projection	
Designer	Chengyang Sun	2024. 7. 16	Model	7" up and down 2.5"	Name: FRP tank	
Review	Jingwei Hu	2024. 7. 18	Version number: 00	Description of Change Version	Drawing No. CD-22-09-27/01	
Approve			Please don't measure the size of the drawing		Unit: mm	1 Page Page 1