


I

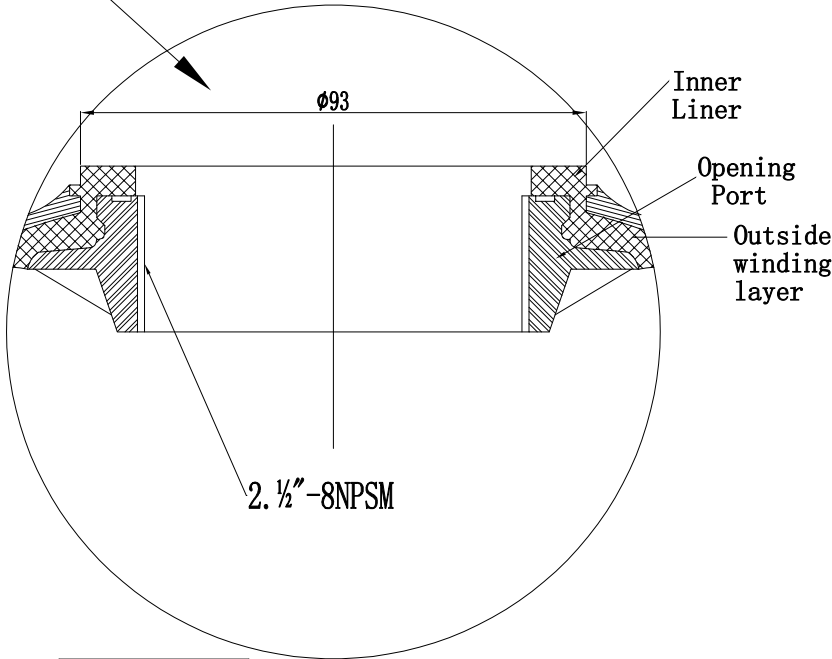

2. 1/2"-8NPSM Internal thread	
Middle Dia	2.762-2.768"
Min Dia	2.705-2.715"
Max Dia	2.843-2.849"

**Remark**  
 1. Product type identification see outer packaging logo.  
 2. The product color is consistent with the color of the tape packaging box.

**Technical Parameters**

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		
10×13	2.5"T	13.0	258	266	336	324	178	146	10	5	2	5	1	Standard	1.7±0.2
10×17	2.5"T	16.4	258	266	429	416	245	146	50	5	2	5	1	Standard	2.8±0.2
10×19	2.5"T	18.8	258	266	494	480	297	146	100	5	2	5	1	Standard	3.2±0.2
10×24	2.5"T	25.0	258	266	622	608	425	146	100	5	2	5	1	Standard	3.5±0.3
10×28	2.5"T	30.0	258	266	722	708	523	146	100	5	2	5	1	Standard	4±0.4
10×35	2.5"T	38.8	258	266	896	873	705	146	100	5	2	5	1	Standard	4.4±0.4
10×44	2.5"T	50.0	258	266	1135	1121	935	146.5	100	5	2	5	1	Standard	5.4±0.4
10×54	2.5"T	62.5	258	266	1380	1366	1195	146.5	100	5	2	5	1	Standard	6.2±0.4

**Note:**

- The vacuum valve must be installed on the device.
- Operation Instructions:
  - Max working pressure: 10.5Bar (150Psi)
  - Temperature Range: 1-50°C (34-127°F)
  - Maximum vacuum: 17Kpa (5"Hg)

<b>Sign</b>		Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material:	FRP	Projection:
Designer	Chengyang Sun	2024. 7. 16	Model:	10 " 2.5"T	Name: FRP tank
Review	Jingwei Hu	2024. 7. 18	Version number: 00	Description of Change Version	Drawing No. CD-22-09-28/20
Approve			Please don't measure the size of the drawing		Unit: mm
					1 Page Page 1