


Technical Parameters												
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)								Base	Weight (kg)
			D1	H1	H2	F	WA	WLB	WB	WLA		
7×13	T2.5"	5.9	181	330	194	10	4.8	1.8	5	1	No	1.4±0.1
7×17	T2.5"	8.3	181	432	296	50	4.8	1.8	5	1	NO	1.6±0.2
7×24	T2.5"	12.4	181	620	475	100	4.8	1.8	5	1	NO	2±0.2
7×30	T2.5"	16.1	181	772	635	100	4.8	1.8	5	1	NO	2.3±0.2
7×35	T2.5"	18.8	181	889	751	100	4.8	1.8	5	1	NO	2.6±0.3
7×44	T2.5"	24.2	181	1118	983	100	4.8	1.8	5	1	NO	3.1±0.3

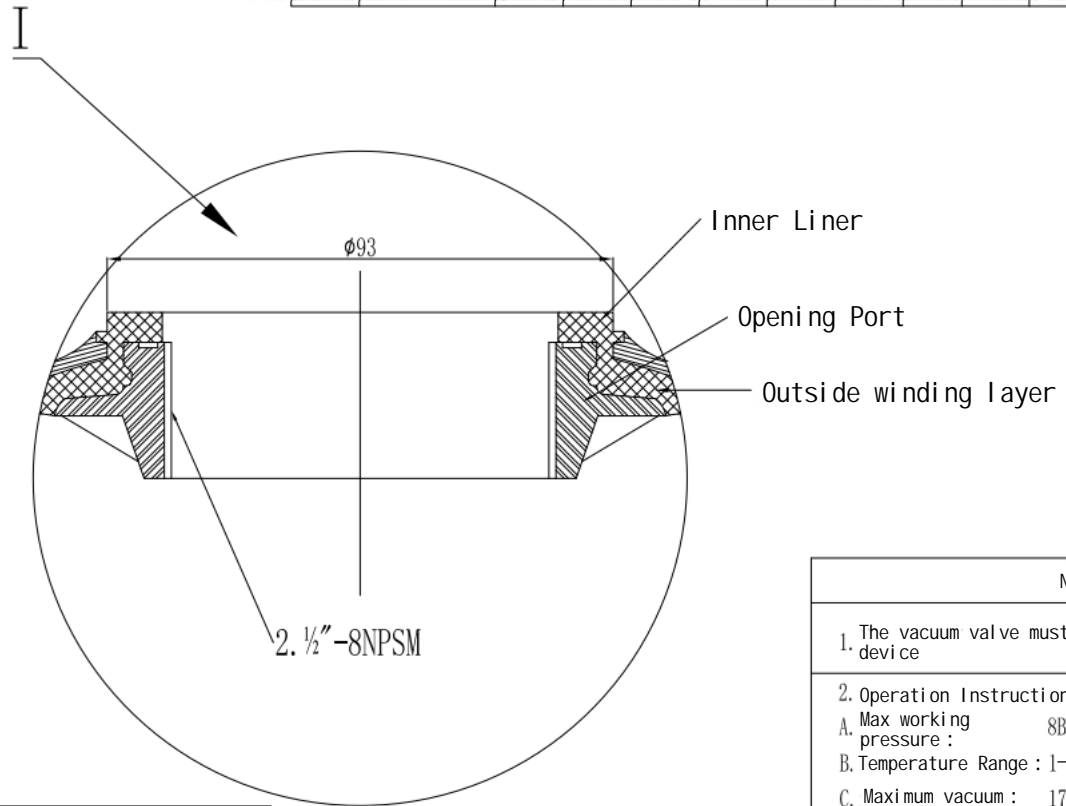

2. 1/2"-8NPSM internal thread	
Medium Dia	2.762-2.768"
Small Dia	2.705-2.715"
Large Dia	2.843-2.849"

Note :	
1. The vacuum valve must be installed on the device	
2. Operation Instructions:	
A. Max working pressure :	8Bar (125Psi)
B. Temperature Range :	1-50°C (34-127°F)
C. Maximum vacuum :	17Kpa (5"Hg)

Remark: 1. Product type identification see outer packaging logo.
 2. The product color is consistent with the color of the tape packaging box.

Sign			Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material :	FRP	Projection :	
Design er	Chengyang Sun	2024.07.18	Model :	7" T 2.5"	Name :	FRP tank
Review	Jingwei Hu	2024.07.18	Version number :	00	Description of Change Version :	Drawing No. CD-22-09-27/04
Approve			Please don't measure the size of the drawing		Unit :	mm
						1 Page Page 1