
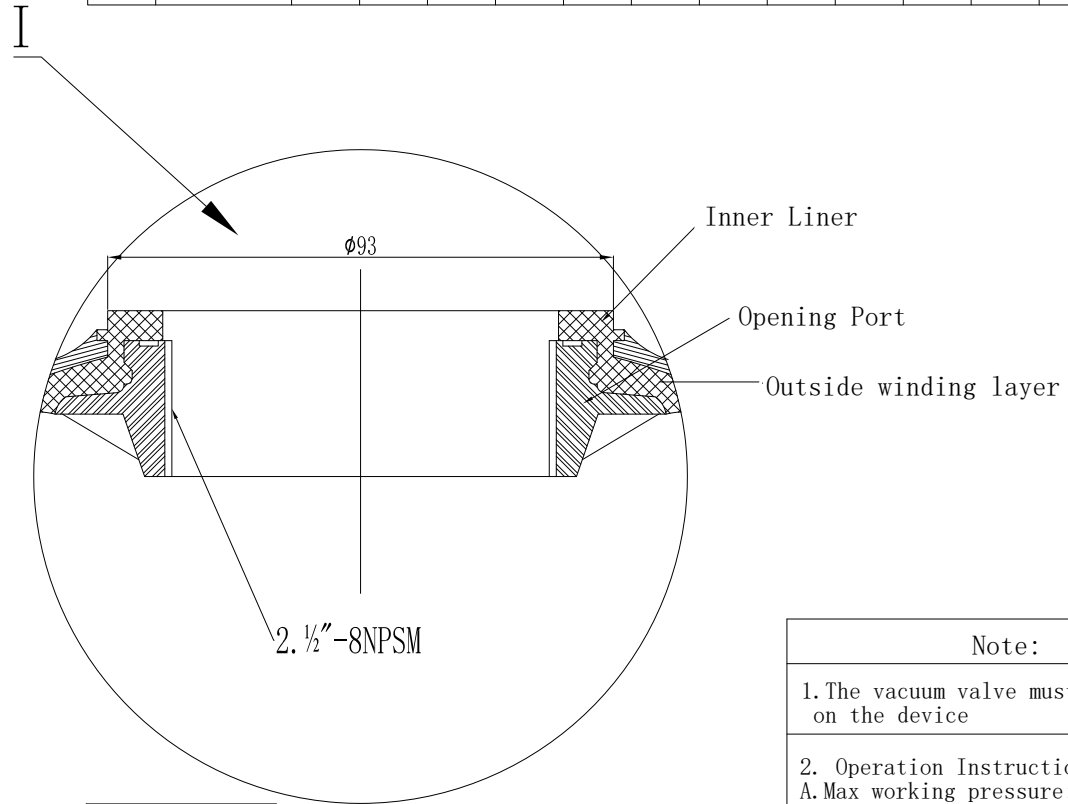


Technical Parameters

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		
7×13	T 2.5"	5.9	181	188	335	320	194	115	10	4.8	1.8	5	1	Standand	1.4±0.1
7×17	T 2.5"	8.3	181	188	437	422	296	115	50	4.8	1.8	5	1	Standand	1.7±0.2
7×24	T 2.5"	12.4	181	188	625	610	475	115	100	4.8	1.8	5	1	Standand	2.1±0.2
7×30	T 2.5"	16.1	181	188	777	762	635	115	100	4.8	1.8	5	1	Standand	2.4±0.2
7×35	T 2.5"	18.8	181	188	894	879	751	115	100	4.8	1.8	5	1	Standand	2.7±0.3
7×44	T 2.5"	24.2	181	188	1124	1108	983	115	100	4.8	1.8	5	1	Standand	3.2±0.3

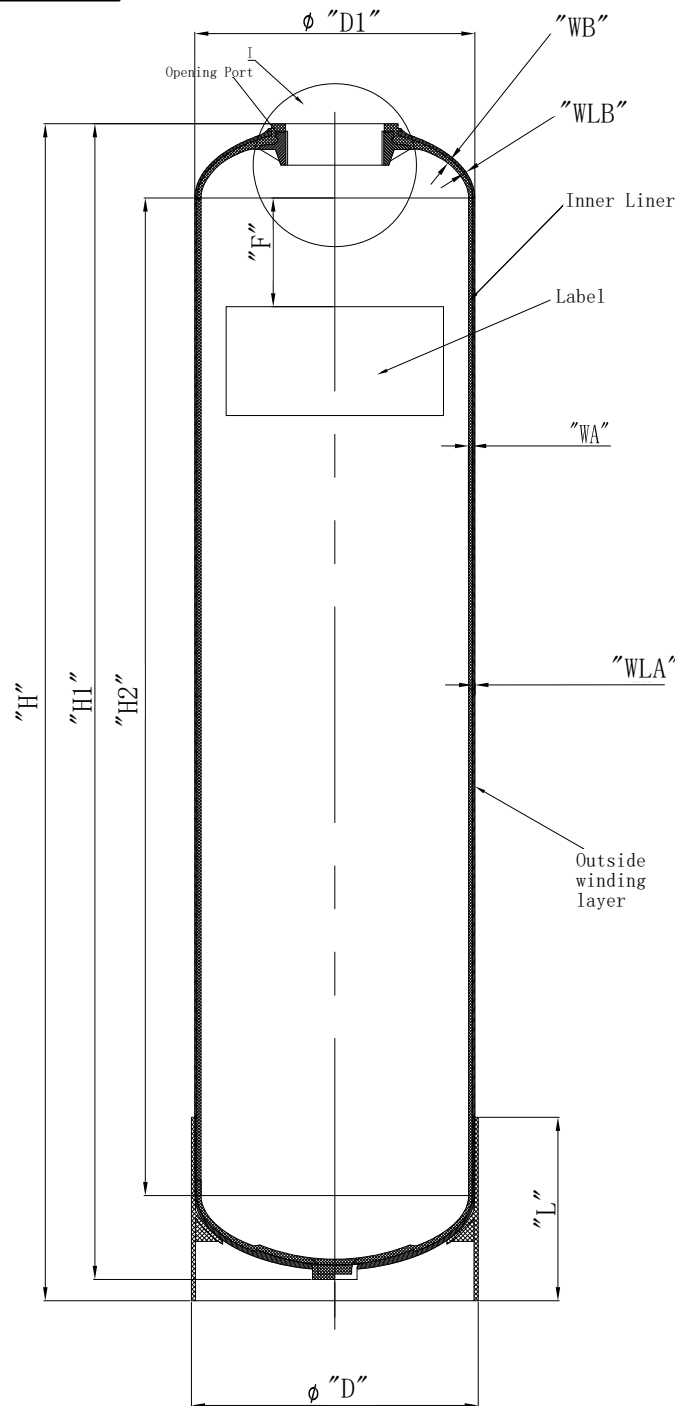

1/2"-8NPSM internal thread	
Middle Dia	2.762-2.768"
Min Dia	2.705-2.715"
Max Dia	2.843-2.849"

Remark
 1. Product type identification see outer packaging logo.
 2. The product color is consistent with the color of the tape packaging box.

Note:
 1. The vacuum valve must be installed on the device
 2. Operation Instructions:
 A. Max working pressure: 8bar(125Psi)
 B. Temperature Range:1-50°C (34-127°F)
 C. Maximum vacuum:17Kpa (5" Hg)

Sign		Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material:	FRP	Projection: $\begin{matrix} \text{---} \\ \oplus \end{matrix}$
Designer	Chengyang Sun	2024.07.18	Model:	7" T 2.5"	Name: FRP tank
Review	Jingwei Hu	2024.07.18	Version number:00	Description of Change Version	Drawing No: CD-22-09-27/03
Approve			Please don't measure the size of the drawing		
			Unit: mm	1 Page	Page 1