


Technical Parameters												
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)								Base	Weight (kg)
			D1	H1±6	H2	F	WA	WLB	WB	WLA		
7X13	T2.5"	5.9	181	320	194	10	4.8	1.8	5	1	No	
7X17	T2.5"	8.3	181	422	296	50	4.8	1.8	5	1	No	
7X24	T2.5"	12.4	181	610	475	100	4.8	1.8	5	1	No	
7X30	T2.5"	16.1	181	762	635	100	4.8	1.8	5	1	No	
7X35	T2.5"	18.8	181	879	751	100	4.8	1.8	5	1	No	
7X44	T2.5"	24.2	181	1108	983	100	4.8	1.8	5	1	No	

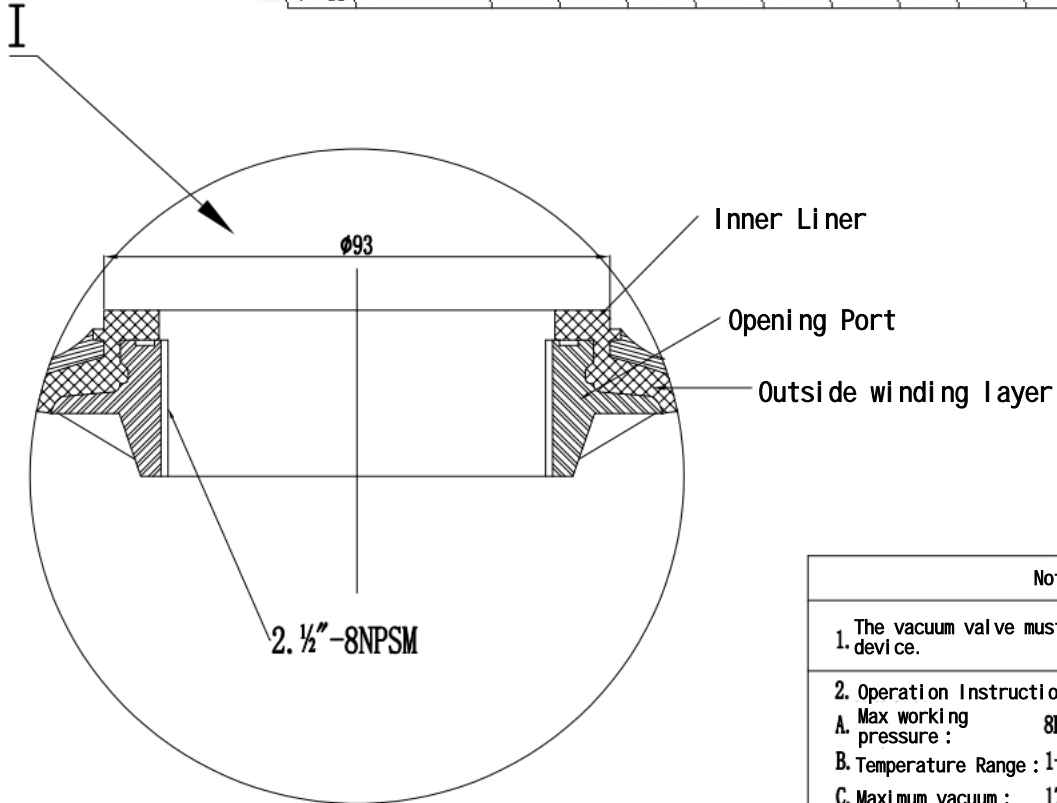

2. 1/2"-8NPSM internal thread	
Medium Dia	2.762-2.768"
Small Dia	2.705-2.715"
Large Dia	2.843-2.849"

Note:

- The vacuum valve must be installed on the device.
- Operation Instructions:
 - A. Max working pressure: 8Bar (125Psi)
 - B. Temperature Range: 1-50°C (34-127°F)
 - C. Maximum vacuum: 17Kpa (5"Hg)

Remark: 1. Product type identification see outer packaging logo.
 2. The product color is consistent with the color of the tape packaging box.

Sign			Hebel Chengda WaterTechnology Co., Ltd			
	Signature	Date	Material :	FRP	Projection:	
Designer	Chengyang Sun	2024. 7. 16	Model :	7" T/B 2.5"	Name:	FRP tank
Reviewer	Jingwei Hu	2024. 7. 18	Version number :	00	Description of Change Version:	Drawing No. CD-22-09-28/06
Approver			Please don't measure the size of the drawing		Unit: mm	1 Page Page 1