


Technical Parameters												
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)								Base	Weight (kg)
			D1	H1	H2	F	WA	WLB	WB	WLA		
8×13	T 2.5"	8.0	206	333	178	10	4.8	1.8	5	1	none	1.4±0.1
8×17	T 2.5"	11.0	206	432	277	50	4.8	1.8	5	1	none	1.6±0.2
8×24	T 2.5"	16.8	206	620	465	100	4.8	1.8	5	1	none	2.1±0.2
8×35	T 2.5"	25.2	206	880	725	100	4.8	1.8	5	1	none	2.8±0.3
8×44	T 2.5"	32.5	206	1120	965	100	4.8	1.8	5	1	none	3.5±0.3

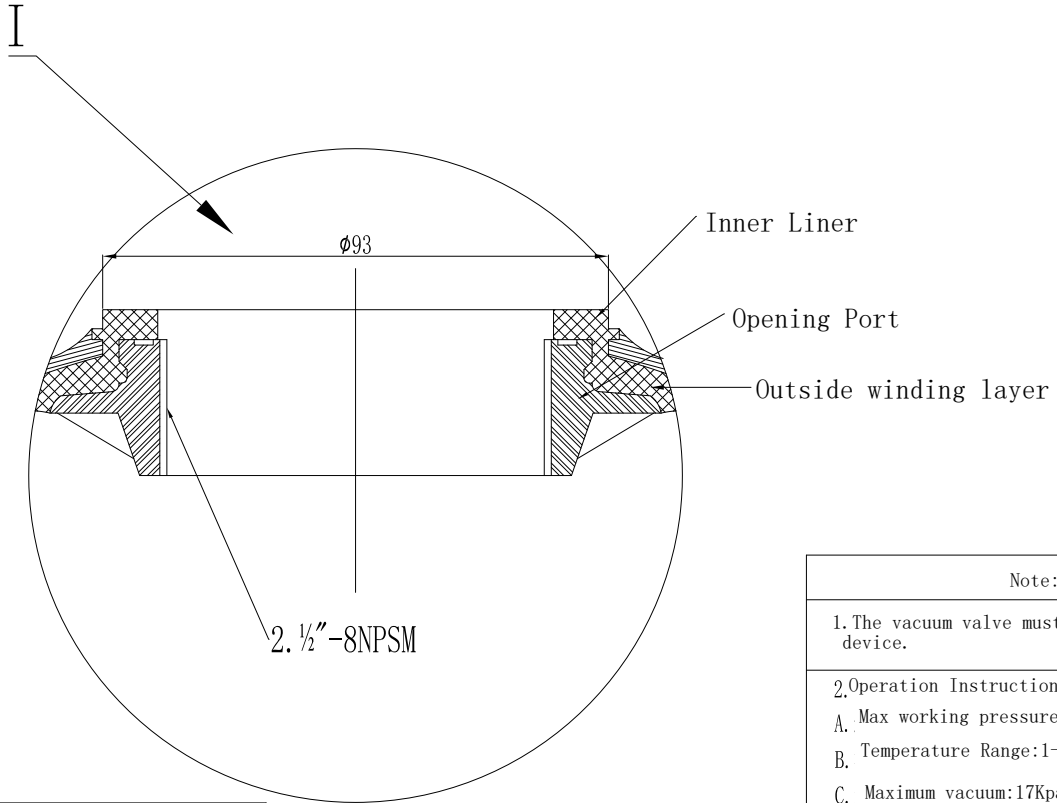

2. 1/2"-8NPSM Internal thread	
Medium Dia	2.762-2.768"
Small Dia	2.705-2.715"
Large Dia	2.843-2.849"

Note:

- The vacuum valve must be installed on the device.
- Operation Instructions:
  - Max working pressure: 8bar(125Psi)
  - Temperature Range:1-50°C (34-127°F)
  - Maximum vacuum:17Kpa (5"Hg)

Remark  
 1. Product type identification see outer packaging logo.  
 2. The product color is consistent with the color of the tape packaging box.

Sign			Hebei Chengda WaterTechnology Co.,Ltd			
	Signature	Date	Material:	FRP	Projection:	
Designer	Chengyang Sun	2024. 07. 18	Model:	8", 2.5"T	Name:FRP tank	
Review	Jingwei Hu	2024. 07. 18	Version number:00	Description of Change Versio:	Drawing No: CD-22-09-27/06	
Approve			Please don't measure the size of the drawing		Unit:mm	1 Page Page 1