
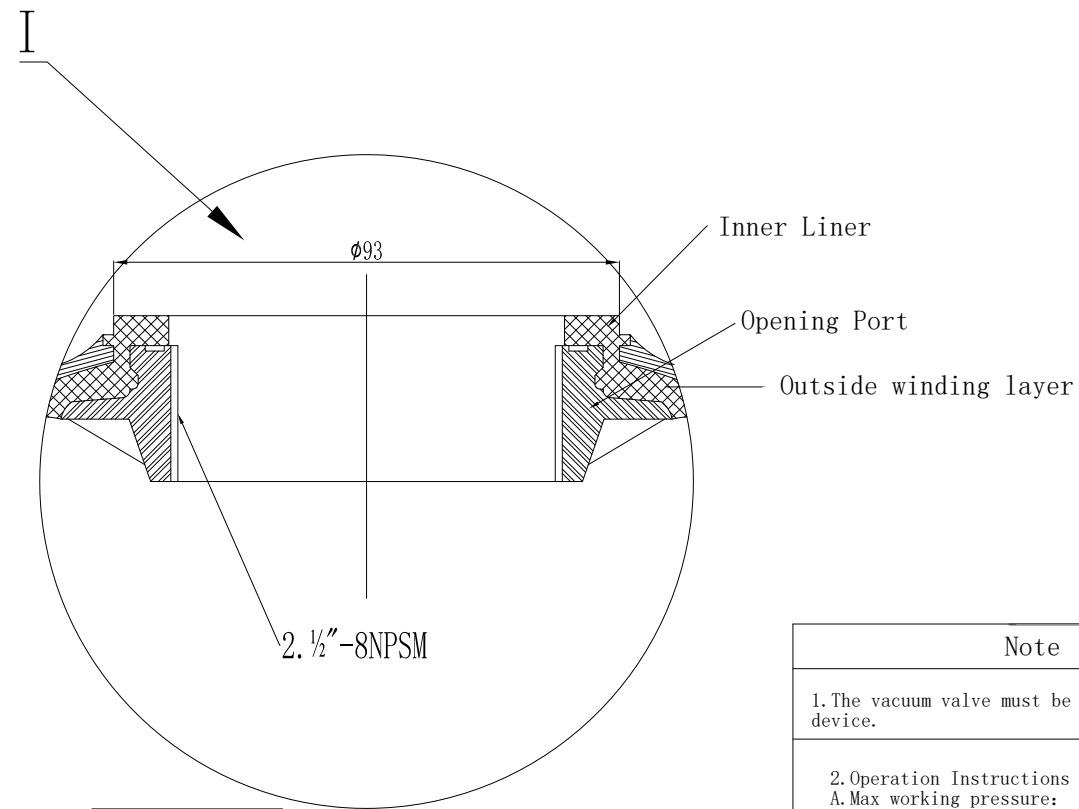


### Technical Parameters

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		
8×13	±2.5"	8.0	206	215	338	328	178	135	10	4.8	1.8	5	1	Standand	1.6±0.1
8×17	±2.5"	11.0	206	215	437	427	277	135	50	4.8	1.8	5	1	Standand	1.8±0.2
8×24	±2.5"	16.8	206	215	625	615	465	135	100	4.8	1.8	5	1	Standand	2.3±0.2
8×35	±2.5"	25.2	206	215	885	875	725	135	100	4.8	1.8	5	1	Standand	3±0.3
8×44	±2.5"	32.5	206	215	1125	1115	965	135	100	4.8	1.8	5	1	Standand	3.7±0.3

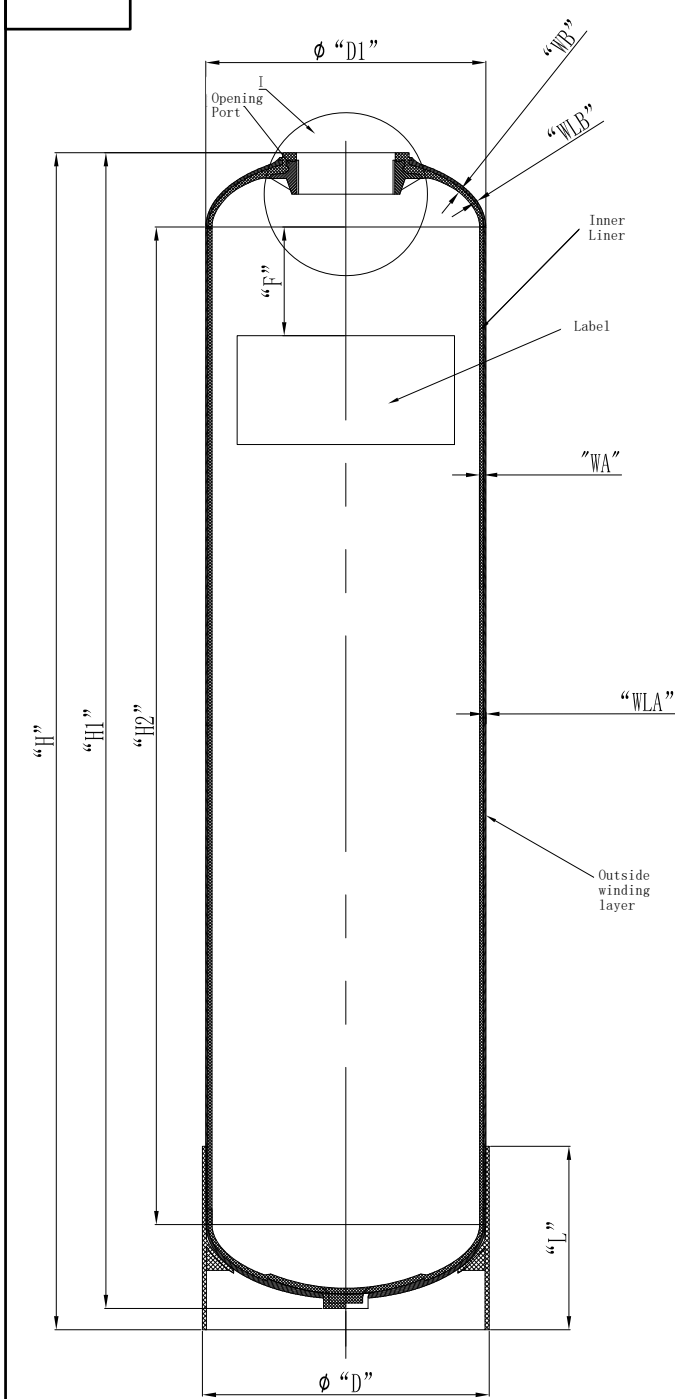

2. 1/2"-8NPSM internal thread	
Middle Dia	2.762-2.768"
Min Dia	2.705-2.715"
Max Dia	2.843-2.849"

**Note**

1. The vacuum valve must be installed on the device.

2. Operation Instructions  
 A. Max working pressure: 8bar(125Psi)  
 B. Temperature Range: 1-50°C (34-127°F)  
 C. Maximum vacuum: 17Kpa (5" Hg)

**Remark**  
 1. Product type identification see outer packaging logo.  
 2. The product color is consistent with the color of the tape packaging box.

Sign		Hebei Chengda WaterTechnology Co., Ltd			
Designer	Chengyang Sun	Date	2024.07.18	Material FRP	FRP
Review	Jingwei Hu	Date	2024.07.18	Model	8" in diameter, 2.5" top port
Approve				Version number: 00	Description of Change Version
				Name: FRP tank	
				Drawing No. CD-22-09-27/01	
Please don't measure the size of the drawing			Unit: mm	1 Page	Page 1