
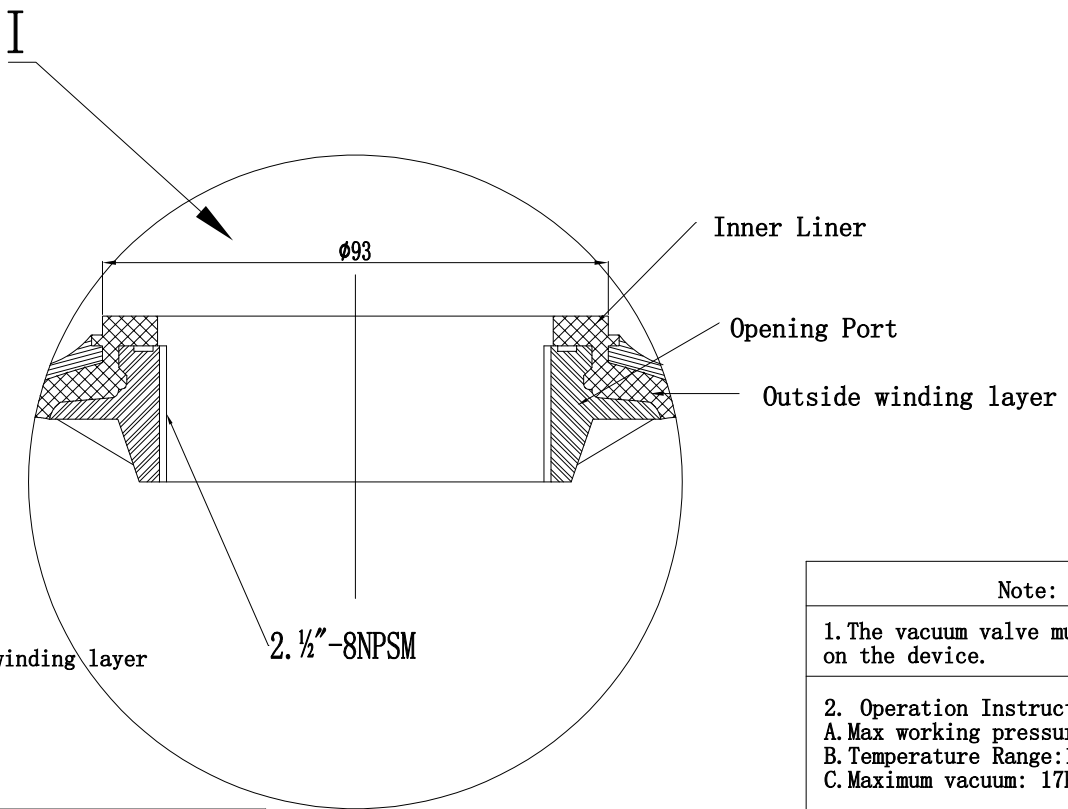


Technical Parameters

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)								Base	Weight (kg)
			D1	H1±6	H2	F	WA	WLB	WB	WLA		
8×13	T 2.5 "	8.0	206	328	178	10	4.8	1.8	5	1	None	
8×17	T 2.5 "	11.0	206	427	277	50	4.8	1.8	5	1	None	
8×24	T 2.5 "	16.8	206	615	465	100	4.8	1.8	5	1	None	
8×35	T 2.5 "	25.2	206	875	725	100	4.8	1.8	5	1	None	
8×44	T 2.5 "	32.5	206	1115	965	100	4.8	1.8	5	1	None	

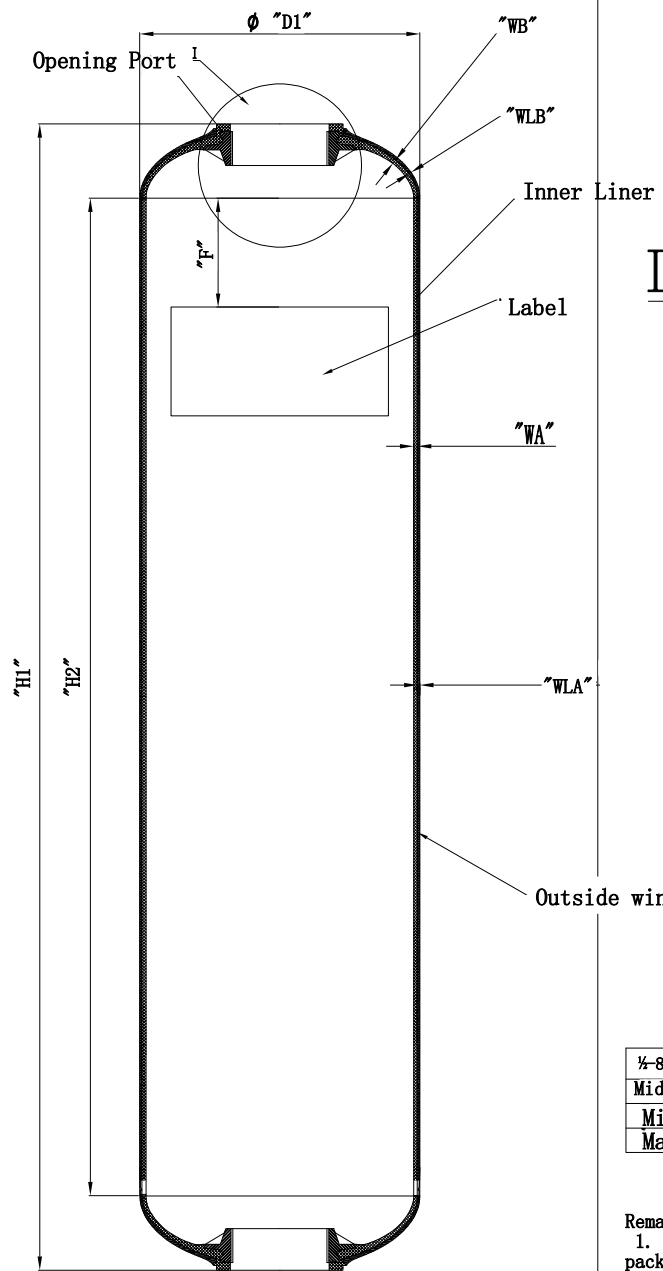

1/2-8NPSM internal thread	
Middle Dia	2.762-2.768"
Min Dia	2.705-2.715"
Max Dia	2.843-2.849"

Remark  
 1. Product type identification see outer packaging logo.  
 2. The product color is consistent with the color of the tape packaging box.

Note:  
 1. The vacuum valve must be installed on the device.  
 2. Operation Instructions:  
 A. Max working pressure: 8bar(125Psi)  
 B. Temperature Range:1-50°C (34-127°F)  
 C. Maximum vacuum: 17Kpa (5" Hg)

Sign			Hebei Chengda WaterTechnology Co., Ltd.			
Designer	Chengyang Sun	Date	2024.7.16	Material FRP	FRP	Projection:
Review	Jingwei Hu	Date	2024.7.18	Model:	8 " T 2.5 "	Name: FRP tank
Approve				Version number:00	Description of Change Version	Drawing No. CD-22-09-28/12
				Please don't measure the size of the drawing		Unit: mm
				1 Page Page 1		