
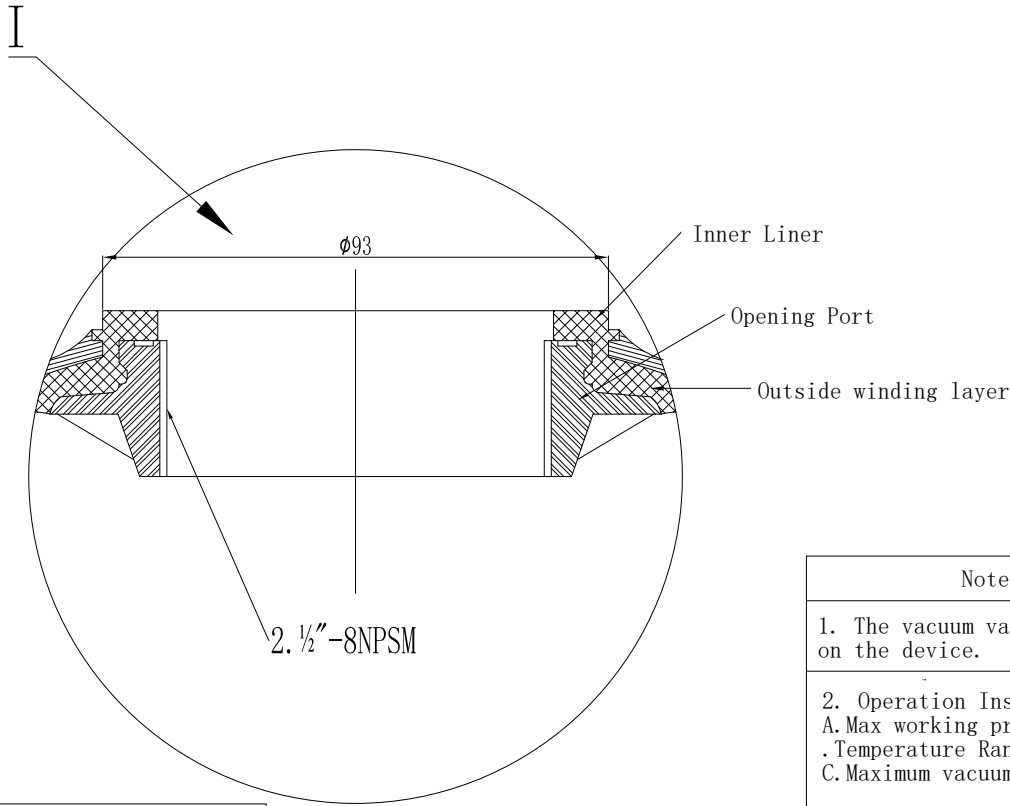


### Technical Parameters

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)								Base	Weight (kg)
			D1	H1	H2	F	WA	WLB	WB	WLA		
9×17	T 2.5"	13.8	231	443	275	50	4.8	1.8	5	1	None	1.9±0.2
9×35	T 2.5"	31.1	231	888	720	100	4.8	1.8	5	1	None	3.2±0.3
9×42	T 2.5"	37.8	231	1061	893	100	4.8	1.8	5	1	None	4.1±0.4
9×48	T 2.5"	43.7	231	1213	1045	100	4.8	1.8	5	1	None	4.5±0.4

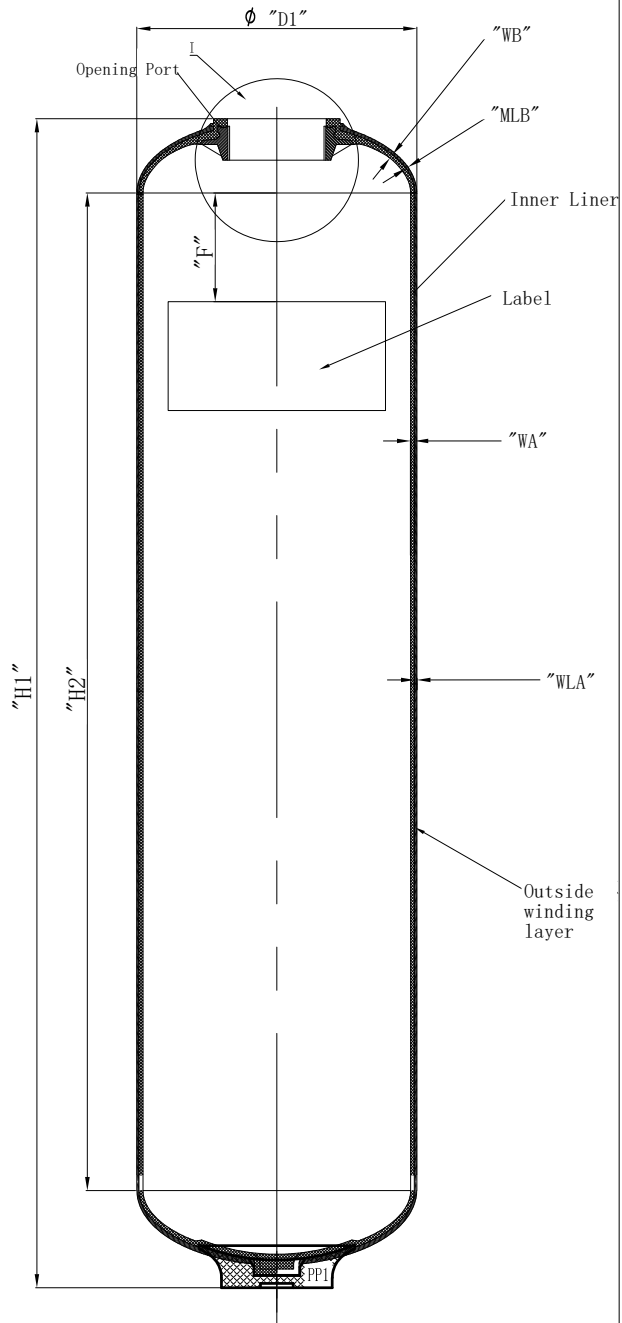

1/2"-8NPSM internal thread	
Middle Dia	2.762-2.768"
Min Dia	2.705-2.715"
Max Dia	2.843-2.849"

Remark  
 1. Product type identification see outer packaging logo.  
 2. The product color is consistent with the color of the tape packaging box.

Note:  
 1. The vacuum valve must be installed on the device.  
 2. Operation Instructions:  
 A. Max working pressure: 8bar (125Psi) B  
 . Temperature Range: 1-50°C (34-127°F)  
 C. Maximum vacuum: 17Kpa (5" Hg)

Sign		Hebei Chengda WaterTechnology Co., Ltd.	
Designer	Chengyang Sun	Material:	FRP
Review	Jingwei Hu	Model:	9" T 2.5"
Approve		Version number: 00	Description of Change Version
		Name: FRP tank	
		Drawing No. CD-22-09-27/08	
		Please don't measure the size of the drawing	
		Unit: mm	1 Page Page 1