
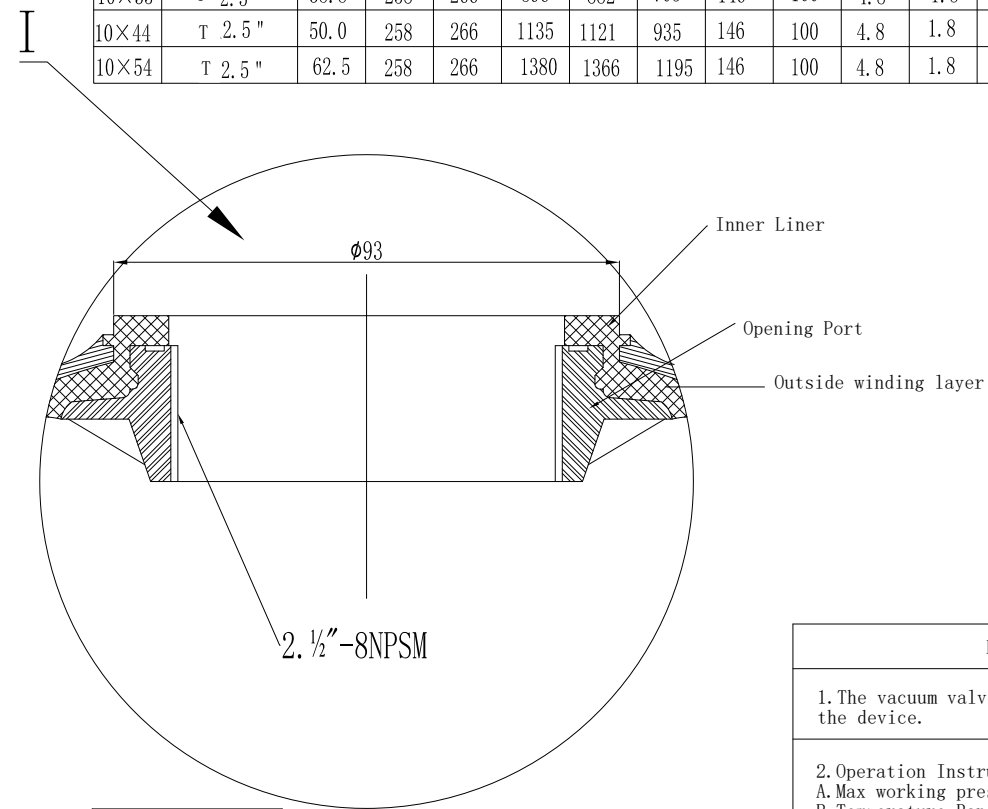


Technical Parameters

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base Standard	Weight (kg)
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		
10×13	T 2.5"	13.0	258	266	336	322	178	146	10	4.8	1.8	5	1	Standard	1.6±0.2
10×17	T 2.5"	16.4	258	266	429	416	245	146	50	4.8	1.8	5	1	Standard	2.7±0.2
10×19	T 2.5"	18.8	258	266	494	480	297	146	100	4.8	1.8	5	1	Standard	3±0.3
10×24	T 2.5"	25.0	258	266	622	608	425	146	100	4.8	1.8	5	1	Standard	3.5±0.3
10×28	T 2.5"	30.0	258	266	722	708	523	146	100	4.8	1.8	5	1	Standard	4±0.4
10×35	T 2.5"	38.8	258	266	896	882	705	146	100	4.8	1.8	5	1	Standard	4.4±0.4
10×44	T 2.5"	50.0	258	266	1135	1121	935	146	100	4.8	1.8	5	1	Standard	5±0.4
10×54	T 2.5"	62.5	258	266	1380	1366	1195	146	100	4.8	1.8	5	1	Standard	6±0.4

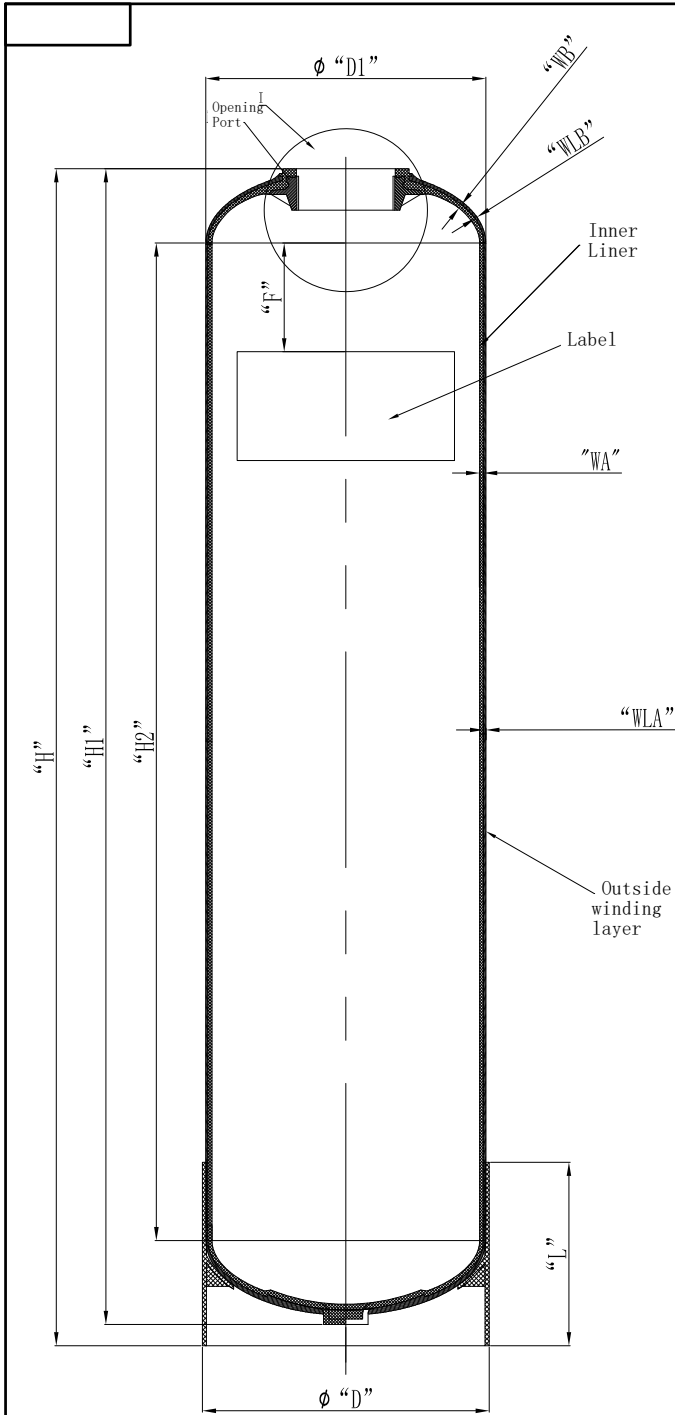

	2. 1/2"-8NPSM	internal thread
Middle Dia	2.762-2.768"	
Min Dia	2.705-2.715"	
Max Dia	2.843-2.849"	

Note

1. The vacuum valve must be installed on the device.

2. Operation Instructions
 A. Max working pressure: 8bar (125Psi)
 B. Temperature Range: 1-50°C (34-127°F)
 C. Maximum vacuum: 17Kpa (5" Hg)

Remark

1. Product type identification see outer packaging logo.
 2. The product color is consistent with the color of the tape packaging box.

Sign		Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material	FRP	Projection
Designer	Chengyang Sun	2024.07.18	Model	10" in diameter, 2.5" top port	Name: FRP tank
Review	Jingwei Hu	2024.07.18	Version number: 00	Description of Change Version	Drawing No. CD-22-09-27/01
Approve			Please don't measure the size of the drawing		Unit: mm
					1 Page Page 1