
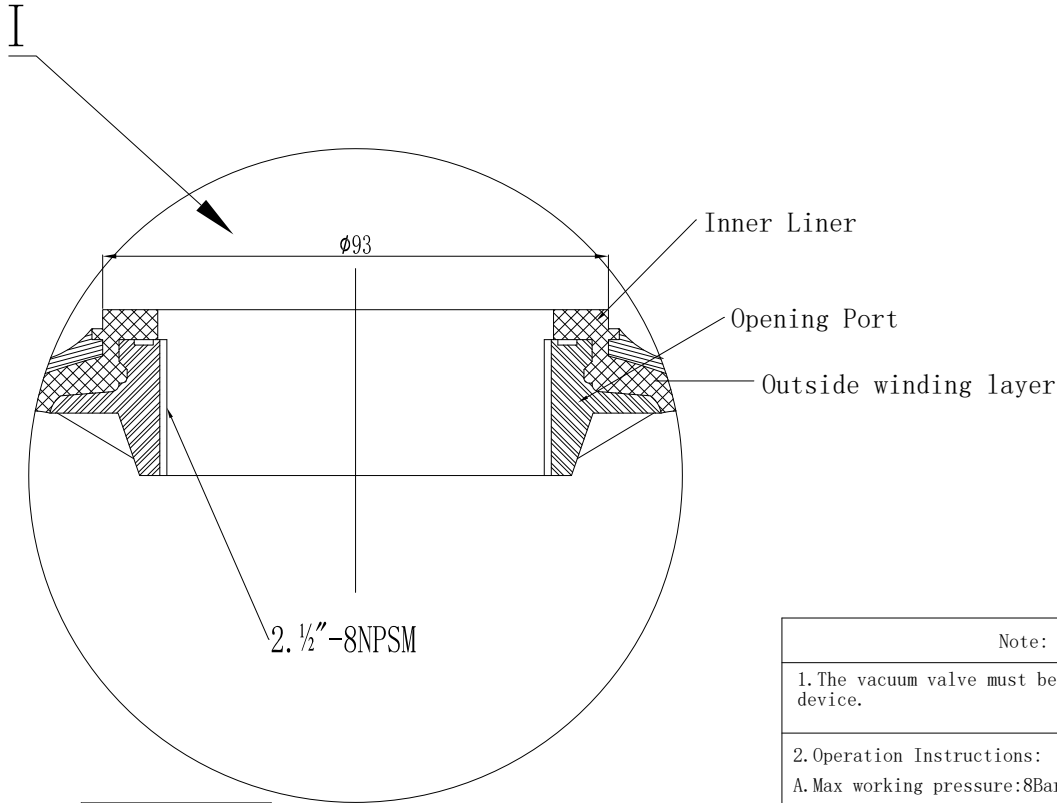


Technical Parameters

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		
13×44	2.5"T	81.1	334	343	1100	1090	878	183	100	5.5	2	5.5	1.5	Standand	7±0.6
13×54	2.5"T	102.3	334	343	1350	1340	1136	183	100	5.5	2	5.5	1.5	Standand	8±0.6

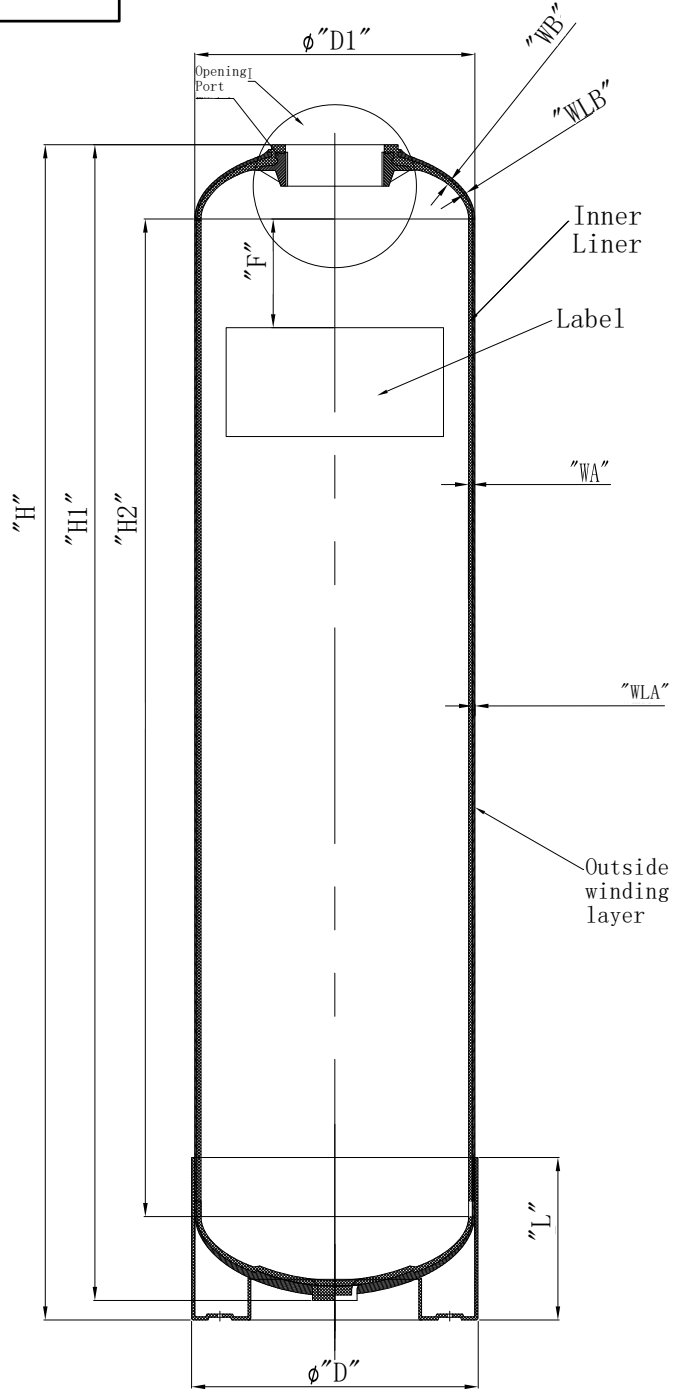

2. 1/2"-8NPSM Internal thread	
Middle Dia	2.762-2.768"
Min Dia	2.705-2.715"
Max Dia	2.843-2.849"

Note:

- The vacuum valve must be installed on the device.
- Operation Instructions:
 - A. Max working pressure:8Bar (125Psi)
 - B. Temperature Range: 1-50°C (34-127°F)
 - C. Maximum vacuum: 17Kpa (5"Hg)

Remark

- Product type identification see outer packaging logo.
- The product color is consistent with the color of the tape packaging box.

Sign		Hebei Chengda WaterTechnology Co.,Ltd.			
	Signature	Date	Material:	FRP	Projection:
Designer	Chengyang Sun	2024.07.18	Model:	13",2.5"T	Name: FRP tank
Review	Jingwei Hu	2024.07.18	Version number:00	Description of Change Version	Drawing No. CD-22-09-27/13
Approve			Please don't measure the size of the drawing		Unit: mm 1 Page Page 1