
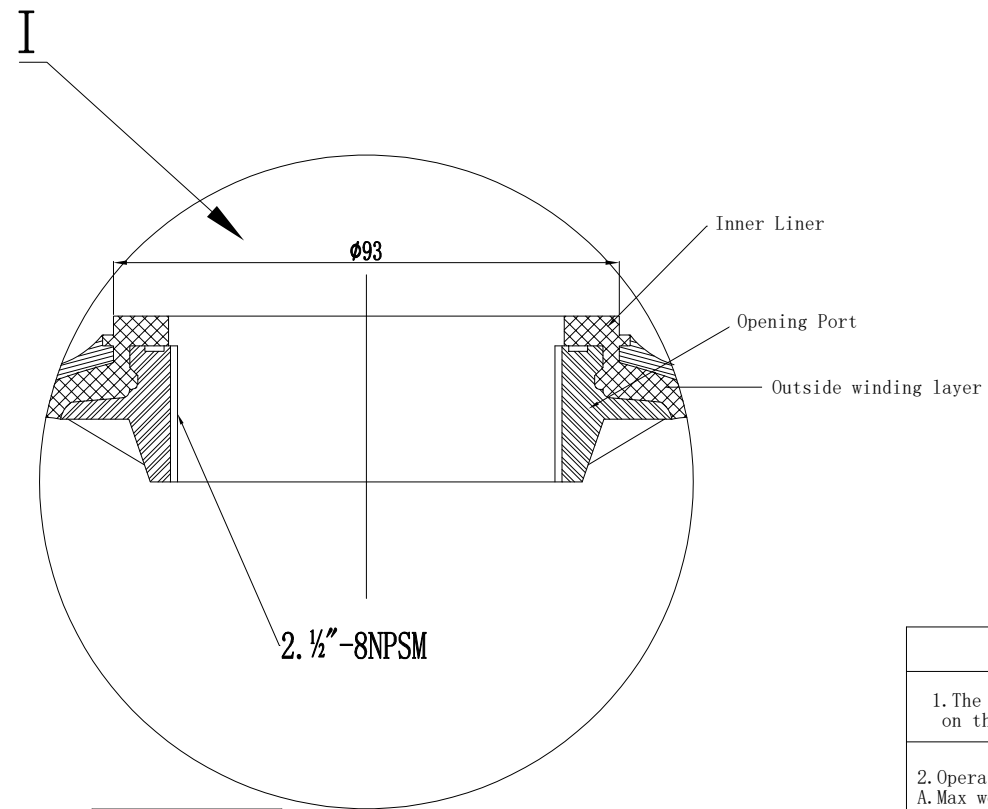


Technical Parameters

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)										Base	Weight (kg)	
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB			WLB
14×52	T 2.5"	115.3	359	369	1336	1331	1060	190	100	8	4	6	2	Standard	11±0.8
14×65	T 2.5"	146.8	359	369	1661	1656	1390	190	100	8	4	6	2	Standard	13.4±0.8

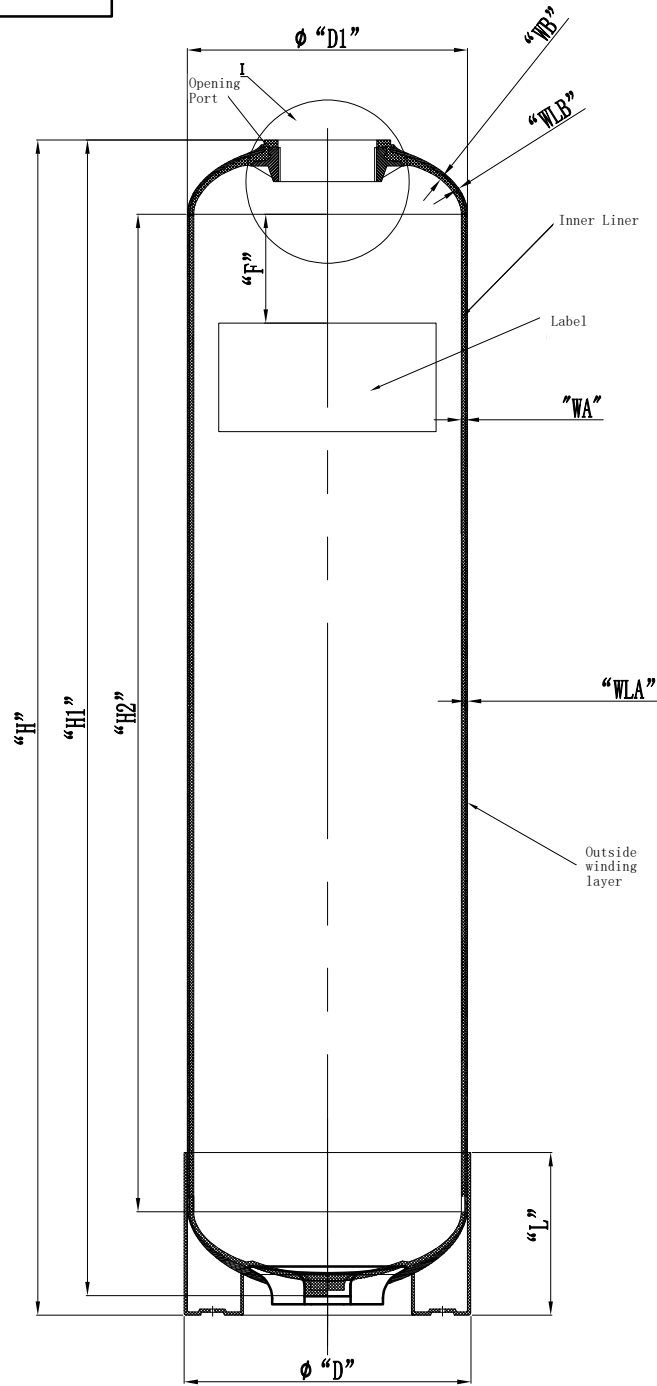

2. 1/2"-8NPSM	internal thread
Middle Dia	2.762-2.768"
Min Dia	2.705-2.715"
Max Dia	2.843-2.849"

Remark  
 1. Product type identification see outer packaging logo.  
 2. The product color is consistent with the color of the tape packaging box.

Note

- The vacuum valve must be installed on the device.
- Operation Instructions  
 A. Max working pressure: 8bar (125Psi)  
 B. Temperature Range: 1-50°C (34-127°F)  
 C. Maximum vacuum: 17Kpa (5" Hg)

Sign		Hebei Chengda WaterTechnology Co., Ltd.		
Designer	Signature Chengyang Sun	Date 2024. 7. 16	Material FRP	Projection ⊥
Review	Jingwei Hu	2024. 7. 18	Model 14" up to 2.5"	Name: FRP tank
Approve			Version number: 00	Description of Change Version
Please don't measure the size of the drawing		Unit: mm	1 Page Page 1	

Drawing No.  
CD-22-09-27/  
01