
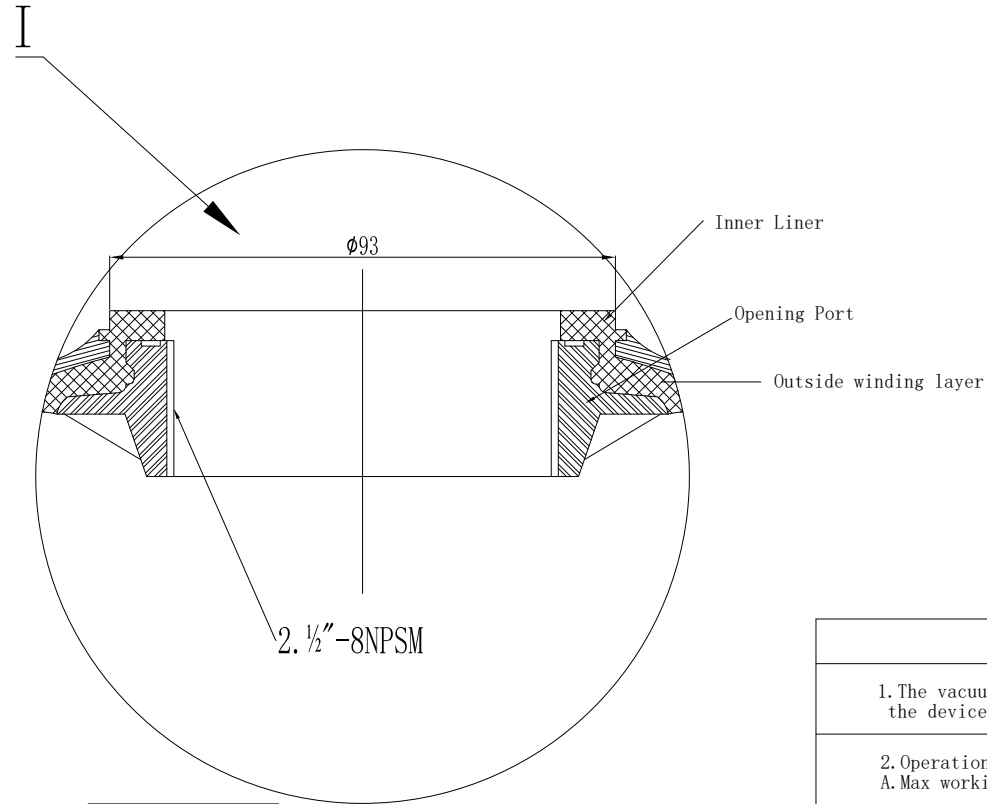


Technical Parameter

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		
16×52	T 2.5"	150.1	417	428	1325	1317	1033	212	100	6	2.5	6	1.8	Standand	11.3±1
16×65	T 2.5"	191.7	417	428	1668	1660	1365	212	100	6	2.5	6	1.8	Standand	13.8±1

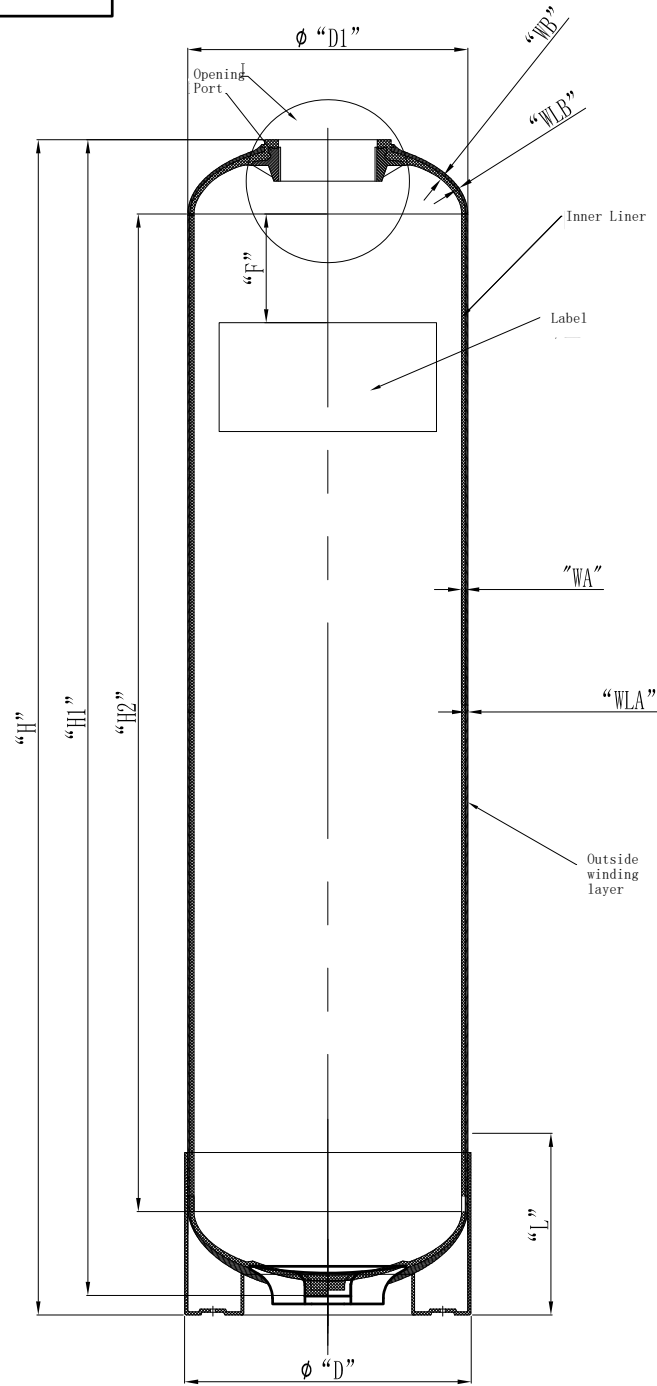

2. 1/2"-8NPSM	internal thread
Middle Dia	2.762-2.768"
Min Dia	2.705-2.715"
Max Dia	2.843-2.849"

Remark
 1. Product type identification see outer packaging logo.
 2. The product color is consistent with the color of the tape packaging box.

Note

- The vacuum valve must be installed on the device.
- Operation Instructions
 - Max working pressure: 8bar(125Psi)
 - Temperature Range: 1-50°C (34-127°F)
 - Maximum vacuum: 17Kpa (5" Hg)

Sign		Hebei Chengda WaterTechnology Co., Ltd.			
Designer	Signature Chengyang Sun	Date 2024.07.18	Material FRP	Projection	
Review	Signature Jingwei Hu	Date 2024.07.18	Model 16" in diameter, 4.4" top port	Name: FRP tank	
Approve			Version number: 00	Description of Change Version	Drawing No. CD-22-09-27/01
Please don't measure the size of the drawing			Unit: mm	1 Page Page 1	