
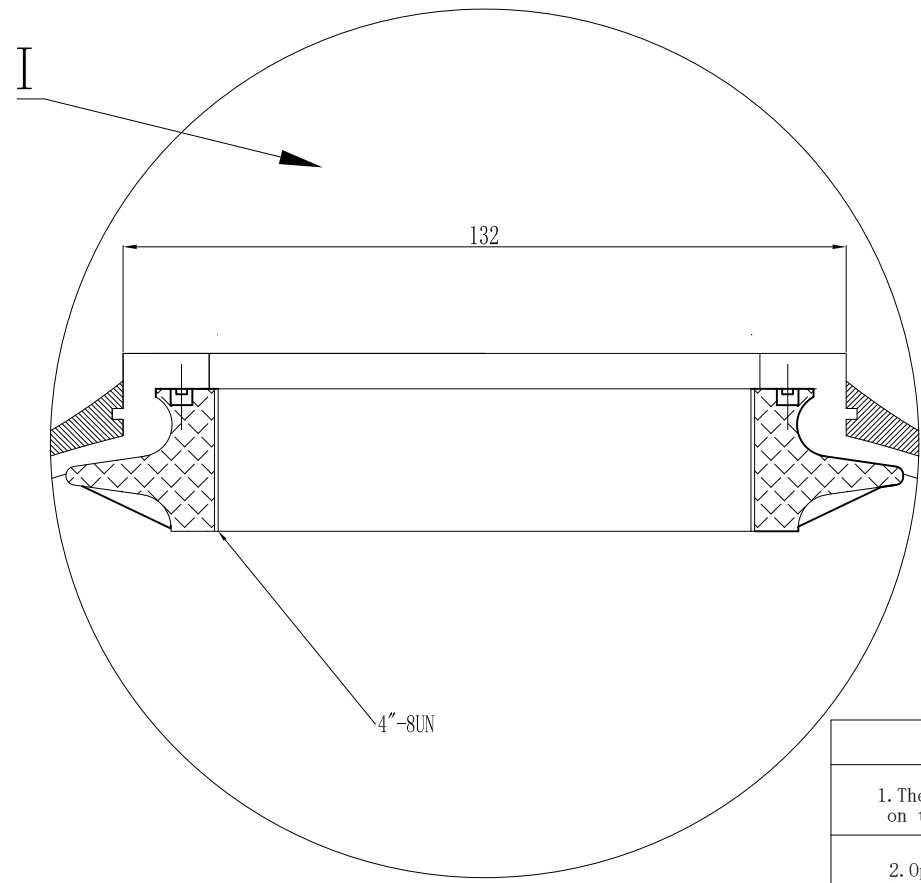


Technical Parameters

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		
16×52	T 4"	150.1	417	428	1325	1317	1033	212	100	6	2.5	6	1.8	Standard	11.3±1
16×65	T 4"	191.7	417	428	1668	1660	1365	212	100	6	2.5	6	1.8	Standard	13.8±1

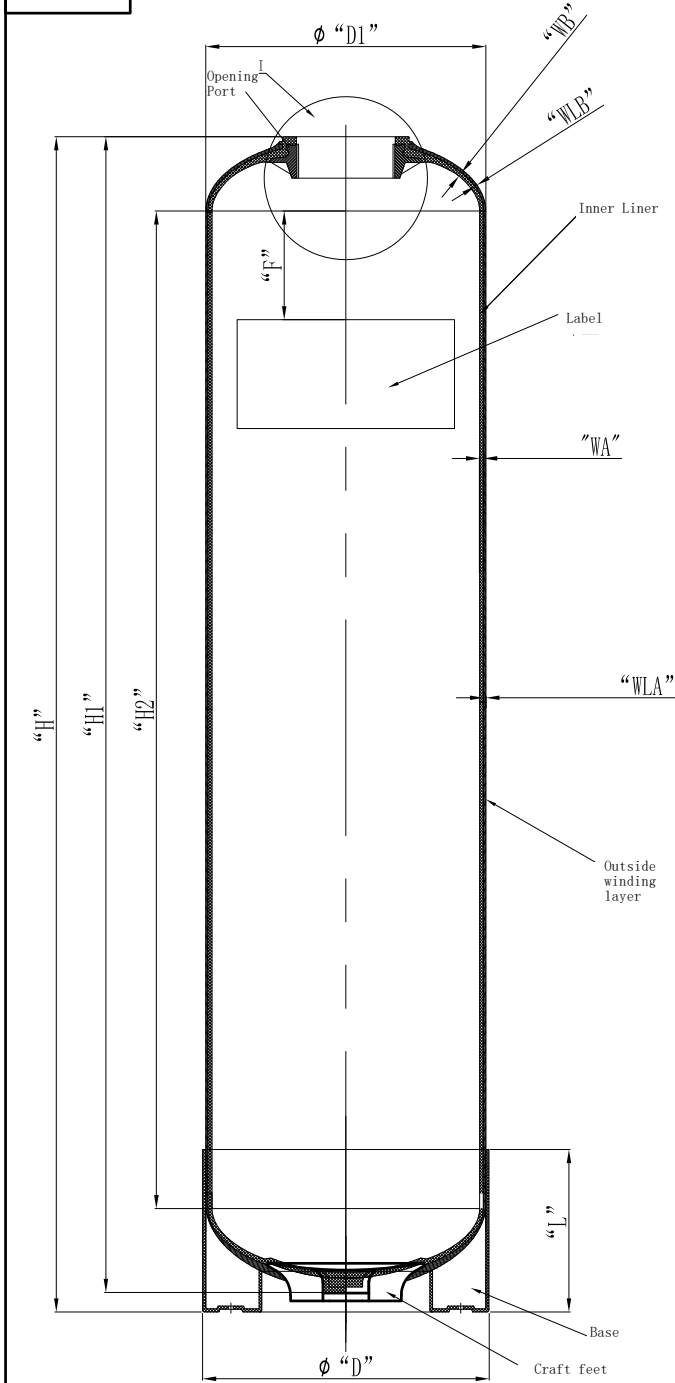

4"-8UN internal thread	
Middle Dia	3.918-3.930"
Min Dia	3.865-3.875"
Max Dia	4.000-4.010"

Note

- The vacuum valve must be installed on the device.
- Operation Instructions
 - A. Max working pressure 8bar(125Psi)
 - B. Temperature Range: 1-50°C (34-127°F)
 - C. Maximum vacuum: 17Kpa (5" Hg)

Remark

- Product type identification see outer packaging logo.
- The product color is consistent with the color of the tape packaging box.

Sign			Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material	FRP	Projection	
Designer	Chengyang Sun	2024.07.18	Model	16" in diameter, 4" top port	Name: FRP tank	Drawing No. CD-22-09-27/01
Review	Jingwei Hu	2024.07.18	Version number: 00	Description of Change Version		
Approve			Please don't measure the size of the drawing		Unit: mm	1 Page Page 1