
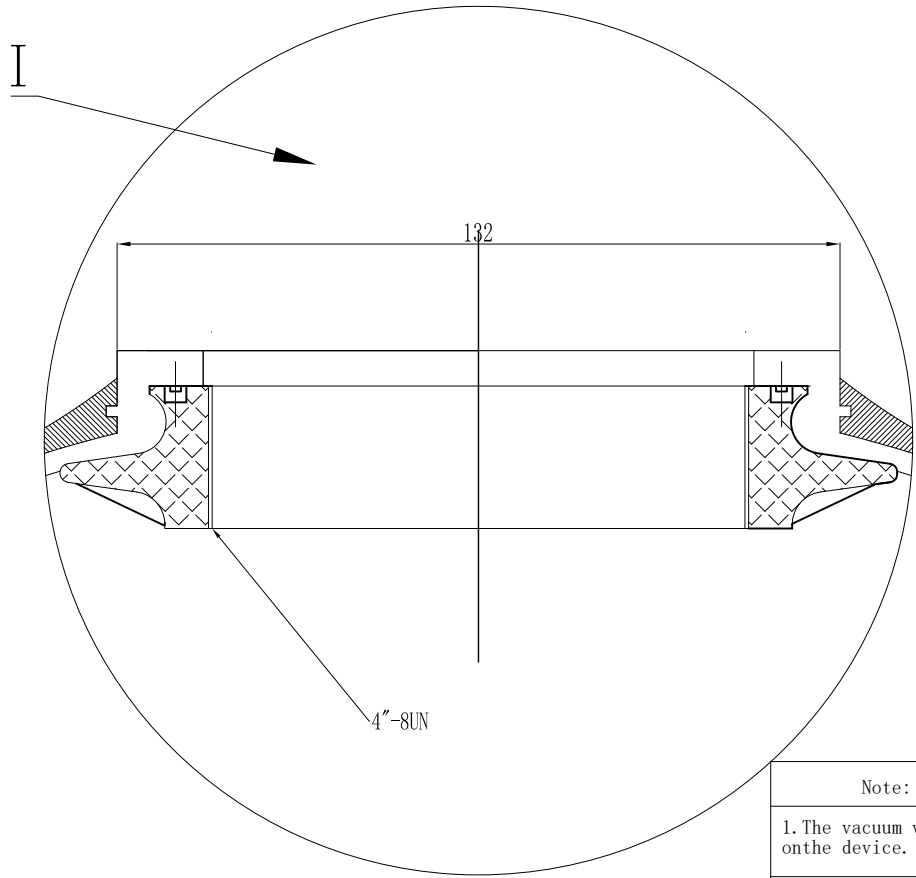


Technical Parameters

| Model | Opening Size | VOL (Ltrs.) | Size Parameters (mm) | | | | | | | | | | | Base | Weight (kg) |
|-------|--------------|-------------|----------------------|-----|------|------|------|-----|-----|----|-----|----|-----|------------|-------------|
| | | | D1 | D | H±10 | H1 | H2 | L | F | WA | WLA | WB | WLB | | |
| 20×69 | 4" T/B | 307.0 | 510 | 500 | 1955 | 1740 | 1365 | 247 | 100 | 7 | 3 | 7 | 2 | Triangular | 22±2 |

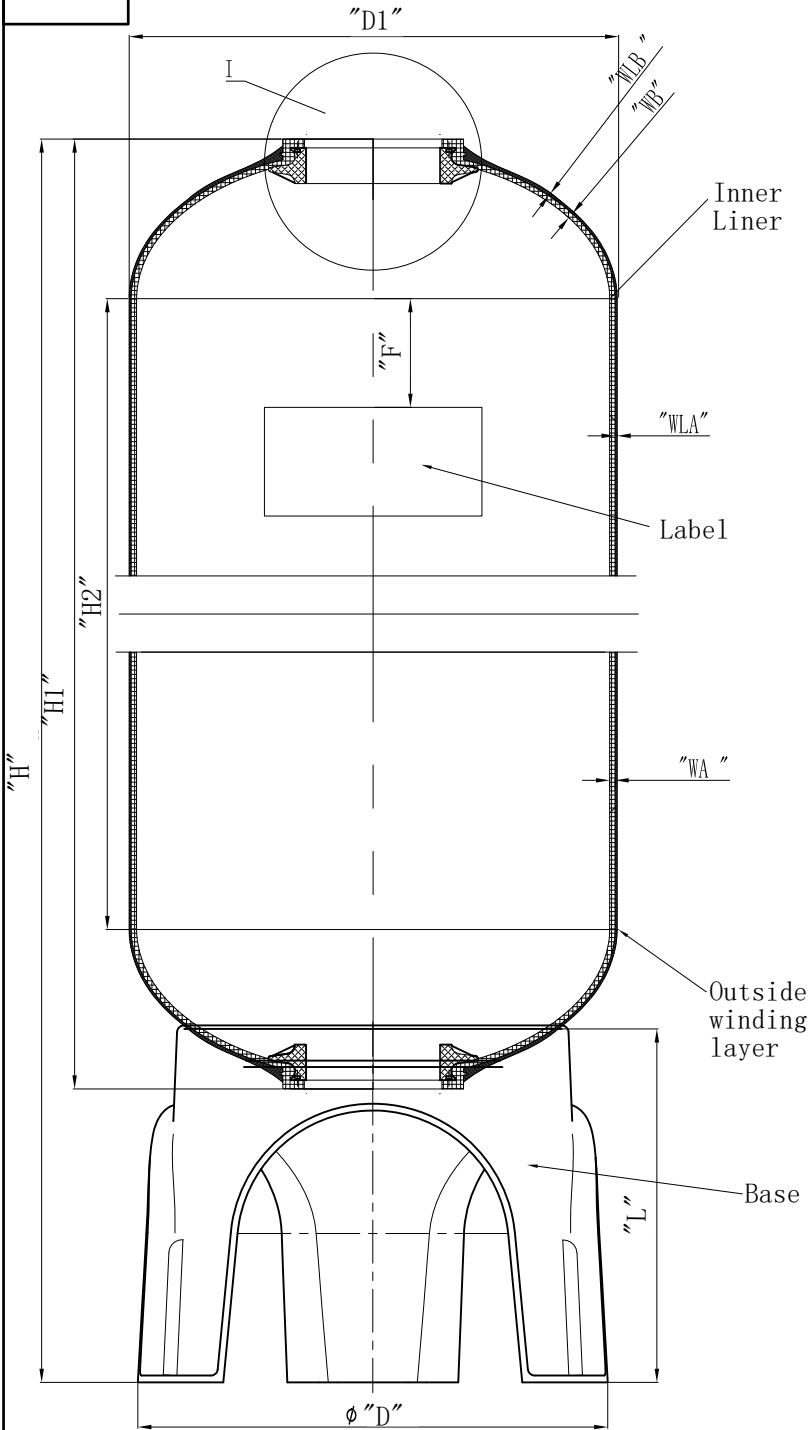

| 4"-8UN Internal thread | |
|------------------------|--------------|
| Middle Dia | 3.918-3.930" |
| Min Dia | 3.865-3.875" |
| Max Dia | 4.000-4.010" |

Note:

- The vacuum valve must be installed on the device.
- Operation Instructions:
 - A. Max working pressure: 8Bar (125Psi)
 - B. Temperature Range: 1-50°C (34-127°F)
 - C. Maximum vacuum: 17Kpa (5"Hg)

Remark

- Product type identification see outer packaging logo.
- The product color is consistent with the color of the tape packaging box.

| Sign | | Hebei Chengda WaterTechnology Co., Ltd. | | | |
|----------|---------------|---|--|-------------------------------|----------------------------|
| | Signature | Date | Material: | FRP | Projection: |
| Designer | Chengyang Sun | 2024.07.18 | Model: | 20" 4" T/B | Name: FRP tank |
| Review | Jingwei Hu | 2024.07.18 | Version number: 00 | Description of Change Version | Drawing No. CD-22-09-27/24 |
| Approve | | | Please don't measure the size of the drawing | | Unit: mm |