


Technical Parameters															
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±25	H1	H2	L	F	WA	WLA	WB	WLB		
24×65	T/B 4"	409.4	612	590	1920	1660	1230	314	100	7	3	7	2	Triangular	32±3
24×72	T/B 4"	460.5	612	590	2080	1820	1395	314	100	7	3	7	2	Triangular	37±3

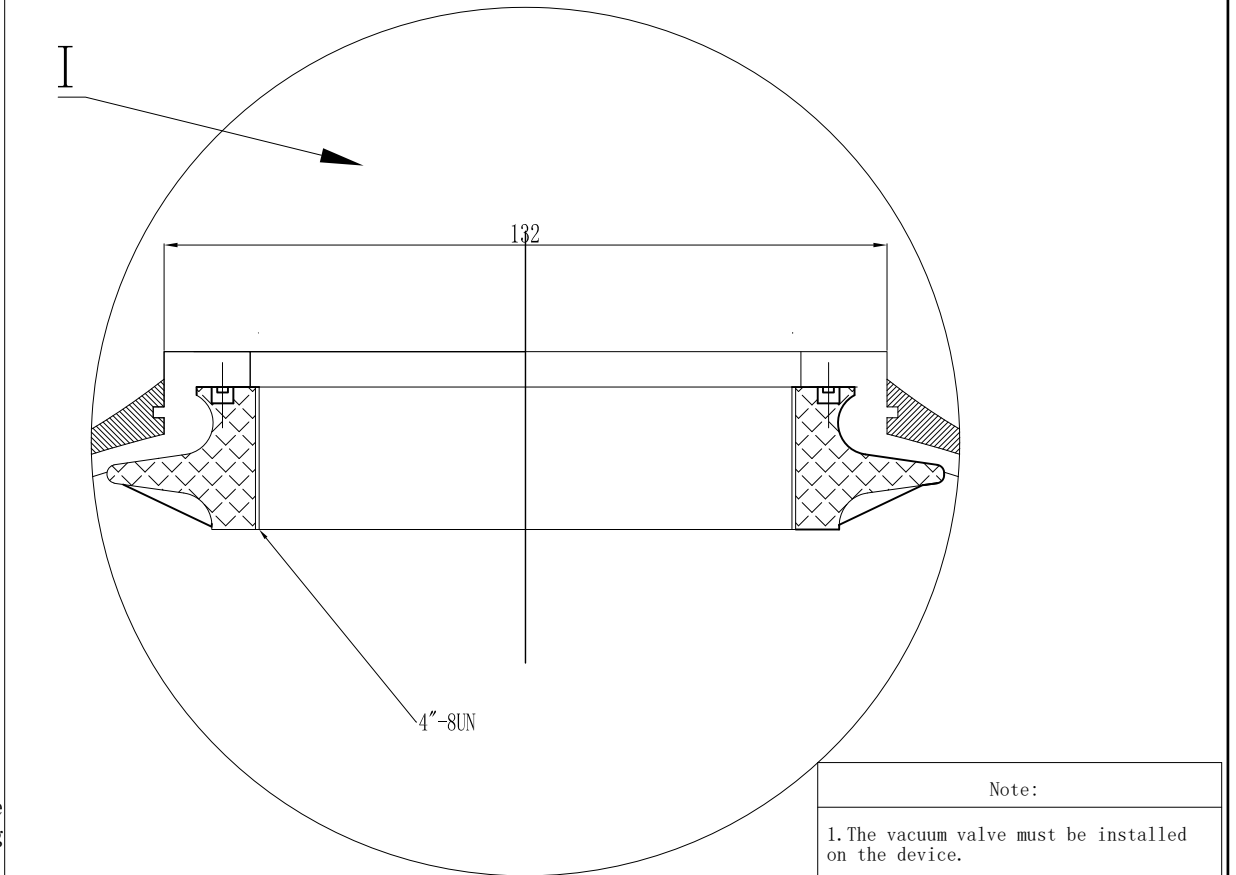

4"-8UN internal thread	
Middle Dia	3.918-3.930"
Min Dia	3.865-3.875"
Max Dia	4.000-4.010"

Note:

- The vacuum valve must be installed on the device.
- Operation Instructions:
  - A. Max working pressure: 8Bar (125Psi)
  - B. Temperature Range: 1-50°C (34-127°F)
  - C. Maximum vacuum: 17Kpa (5" Hg)

Remark

- Product type identification see outer packaging logo.
- The product color is consistent with the color of the tape packaging box.

Sign			Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material:	FRP	Projection:	
Designer	Chengyang Sun	2024.07.18	Model:	24",4"T/B	Name:	FRP tank
Review	Jingwei Hu	2024.07.18	Version number:	00	Description of Change Version:	Drawing No. : CD-22-09-27/27
Approve			Please don't measure the size of the drawing		Unit: mm	1 Page Page 1