
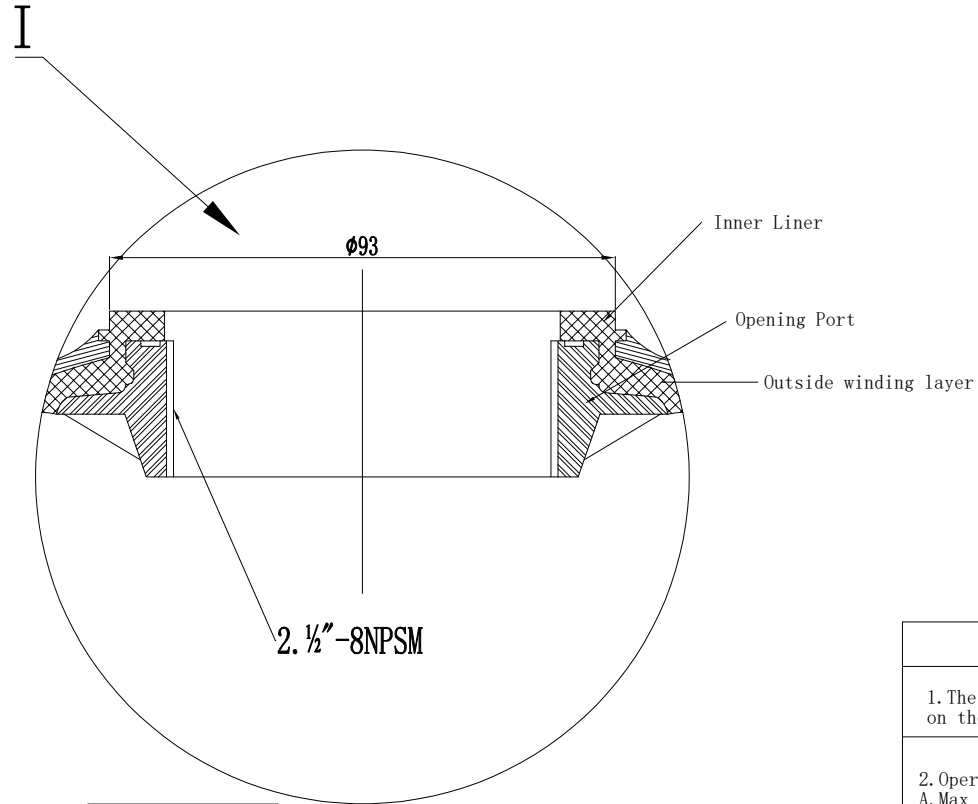


Technical Parameters

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		
16×52	T 2.5"	150.1	418	428	1325	1317	1033	212	100	8	4	6	2	Standand	13.2±1
16×65	T 2.5"	191.7	418	428	1668	1660	1365	212	100	8	4	6	2	Standand	15.9±1

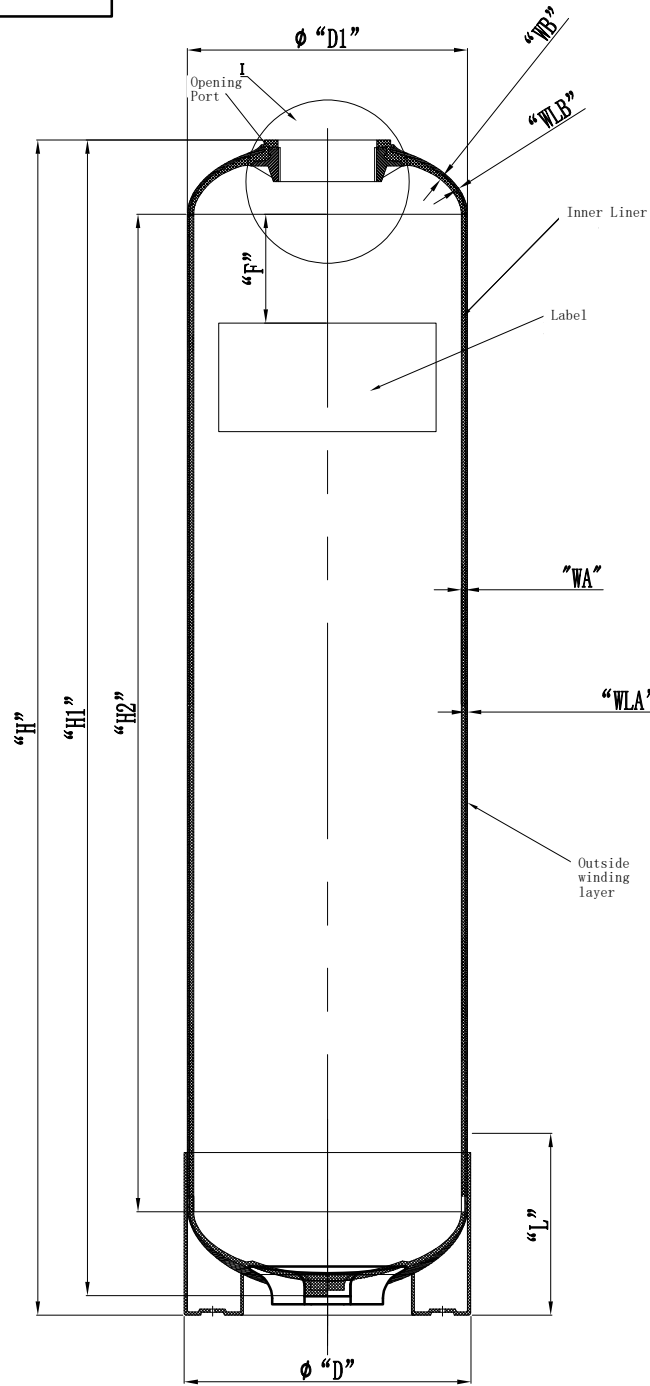

2. 1/2"-8NPSM	internal thread
Middle Dia	2.762-2.768"
Min Dia	2.705-2.715"
Max Dia	2.843-2.849"

Remark
 1. Product type identification see outer packaging logo.
 2. The product color is consistent with the color of the tape packaging box.

Note

- The vacuum valve must be installed on the device.
- Operation Instructions
 A. Max working pressure: 8bar (125Psi)
 B. Temperature Range: 1-50°C (34-127°F)
 C. Maximum vacuum: 17Kpa (5" Hg)

Sign		Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material	FRP	Projection
Designer	Chengyang Sun	2024. 7. 16	Model	16" up 2.5"	Name: FRP tank
Review	Jingwei Hu	2024. 7. 18	Version number: 00	Description of Change Version	Drawing No. CD-22-09-27/01
Approve			Please don't measure the size of the drawing		Unit: mm 1 Page Page 1