
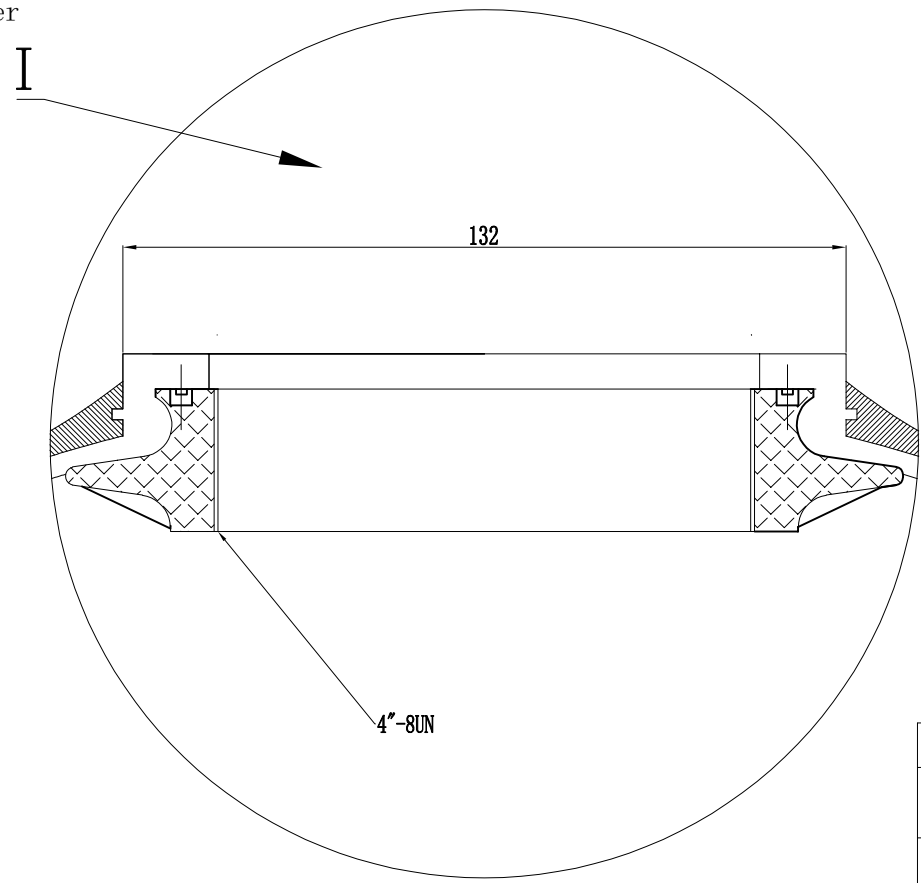


Technical Parameters

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		
16×52	T 4"	150.1	418	428	1325	1317	1033	212	100	8	4	6	2	Standard	13.2±1
16×65	T 4"	191.7	418	428	1668	1660	1365	212	100	8	4	6	2	Standard	15.9±1

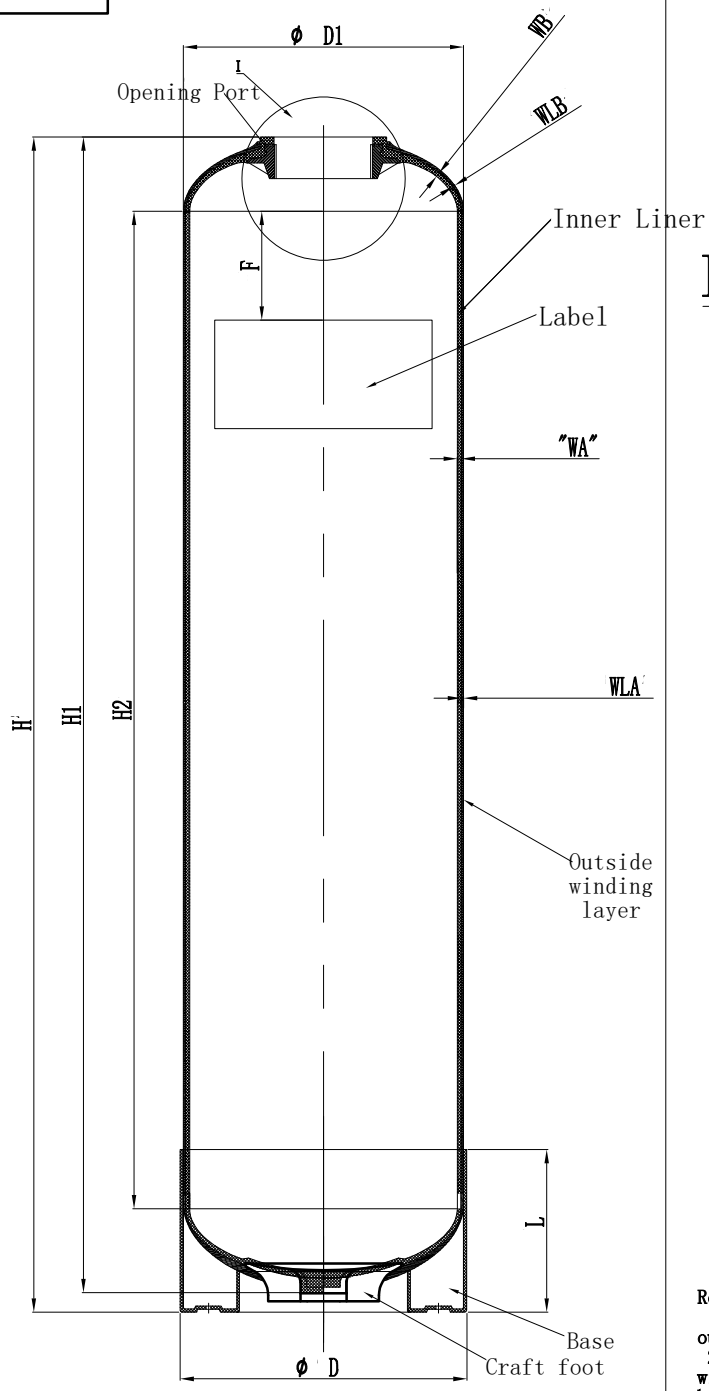

4"-8UN internal thread	
Middle Dia	3.918-3.930"
Min Dia	3.865-3.875"
Max Dia	4.000-4.010"

Note
1. The vacuum valve must be installed on the device.
2. Operation Instructions: A. Max working pressure:10.5bar (150Psi) B. Temperature Range:1-50℃ (34-127°F) C. Maximum vacuum:17Kpa (5"Hg)

Remark  
 1. Product type identification see outer packaging logo.  
 2. The product color is consistent with the color of the tape packaging box.

Sign		Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material	FRP	Projection: $\triangleleft \oplus$
Designer	Chengyang Sun	2024. 7. 16	Model	16 "T 4 "	Name: FRP tank
Review	Jingwei Hu	2024. 7. 18	Version number:00	Description of Change Version	Drawing No. CD-22-09-28/37
Approve			Please don't measure the size of the drawing		Unit: mm
					1 Page Page 1