


Technical Parameters															
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±10	H1	H2	L	F	WA	WLA	WB	WLB		
16×52	T/B 4"	150.1	418	415	1534	1317	1060	282	100	8	4	6	2	Triangular	14.3±1
16×65	T/B 4"	191.7	418	415	1877	1660	1365	282	100	8	4	6	2	Triangular	16.8±1

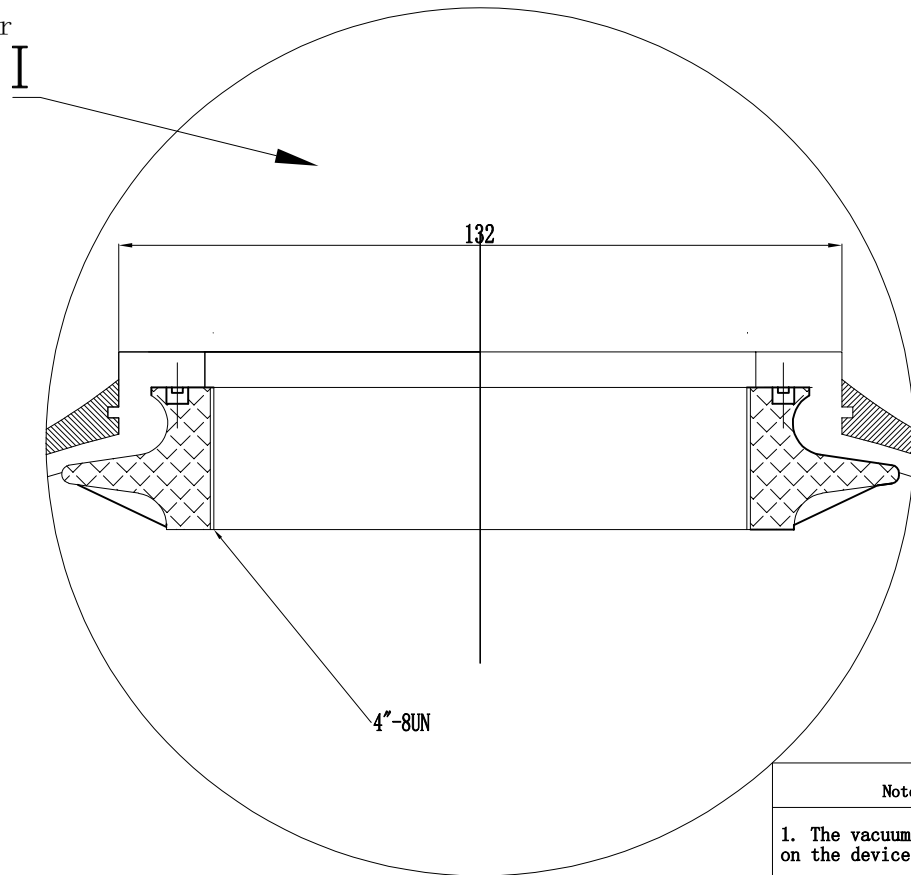

4"-8UN internal thread	
Middle Dia	3.918-3.930"
Min Dia	3.865-3.875"
Max Dia	4.000-4.010"

Note

- The vacuum valve must be installed on the device.
- Operation Instructions:
 A. Max working pressure: 10.5bar (150Psi)
 B. Temperature Range: 1-50°C (34-127°F)
 C. Maximum vacuum: 17Kpa (5"Hg)

Remark

- Product type identification see outer packaging logo.
- The product color is consistent with the color of the tape packaging box.

Sign		Hebei Chengda WaterTechnology Co., Ltd.			
Designer	Chengyang Sun	Date	2024.7.16	Material	FRP
Review	Jingwei Hu	Date	2024.7.18	Model	16 "T/B 4"
Approve				Version number: 00	Description of Change Version
				Projection:	
				Name:	FRP tank
				Drawing No.	CD-22-09-28/38
				Unit:	mm
				1 Page Page 1	

Please don't measure the size of the drawing