


Technical Parameters															
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±25	H1	H2	L	F	WA	WLA	WB	WLB		
24×65	T/B 4"	409.4	614	600	1724	1684	1230	131	100	9	5	7	3		37±3
24×72	T/B 4"	460.5	614	600	1884	1844	1395	131	100	9	5	7	3	Triangular	41±3

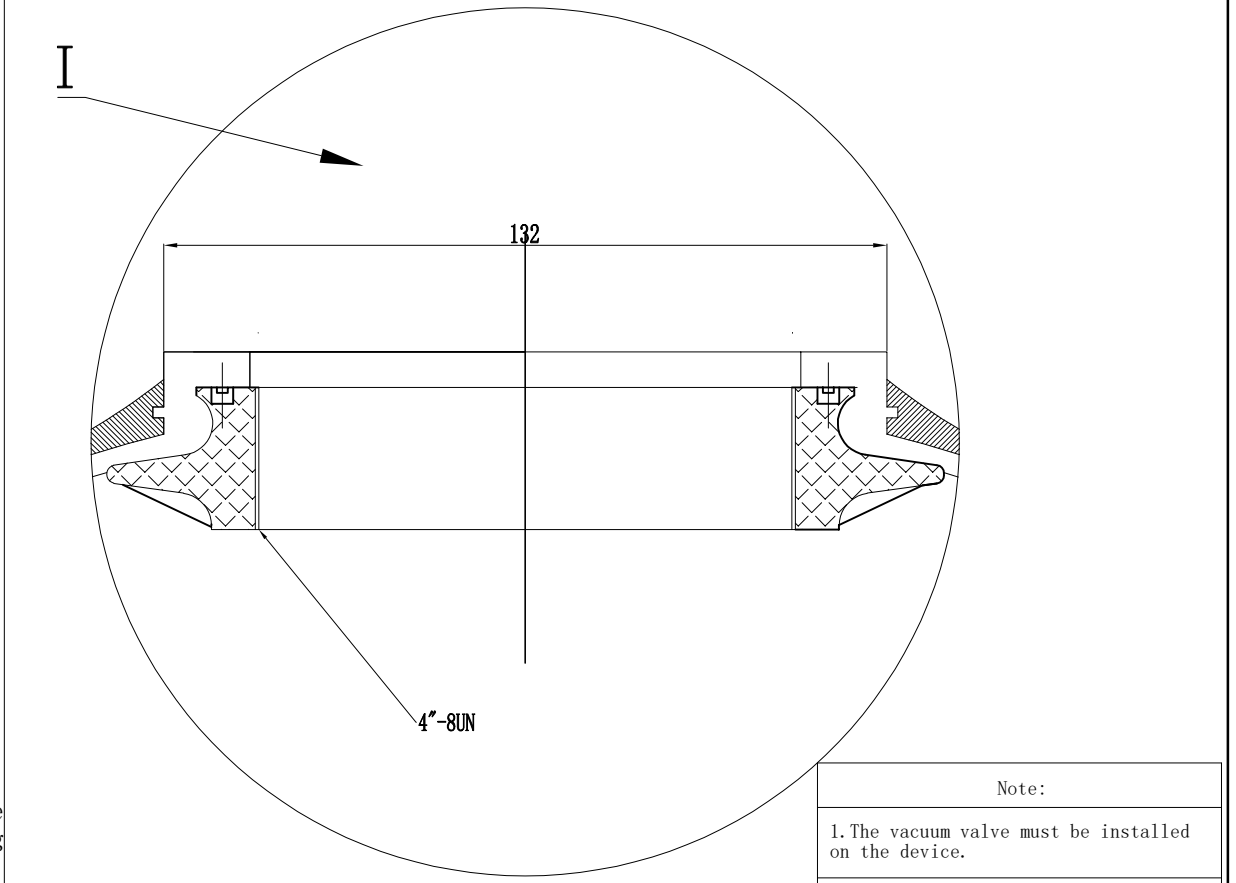

4"-8UN	internal thread
Middle Dia	3.918-3.930"
Min Dia	3.865-3.875"
Max Dia	4.000-4.010"

Note:

- The vacuum valve must be installed on the device.
- Operation Instructions
 - A. Max working pressure: 10.5Bar (150Psi)
 - B. Temperature Range: 1-50°C (34-127°F)
 - C. Maximum vacuum: 17Kpa (5" Hg)

Remark

- Product type identification see outer packaging logo.
- The product color is consistent with the color of the tape packaging box.

Sign		Hebei Chengda WaterTechnology Co., Ltd.			
Designer	Signature Chengyang Sun	Date 2024. 7. 16	Material: FRP	Projection: 24°, 4"T	Projection: Name: FRP tank
Review	Jingwei Hu	2024. 7. 18	Version number: 00	Description of Change Version:	Drawing No. : CD-22-09-28/58
Approve			Please don't measure the size of the drawing.		Unit: mm 1 Page Page 1