


Technical Parameters															
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±25	H1	H2	L	F	WA	WLA	WB	WLB		
24×65	T/B4"	409.4	614	590	1920	1660	1230	314	100	9	5	7	3	Triangular	39±3
24×72	T/B4"	460.5	614	590	2080	1820	1395	314	100	9	5	7	3	Triangular	43±3

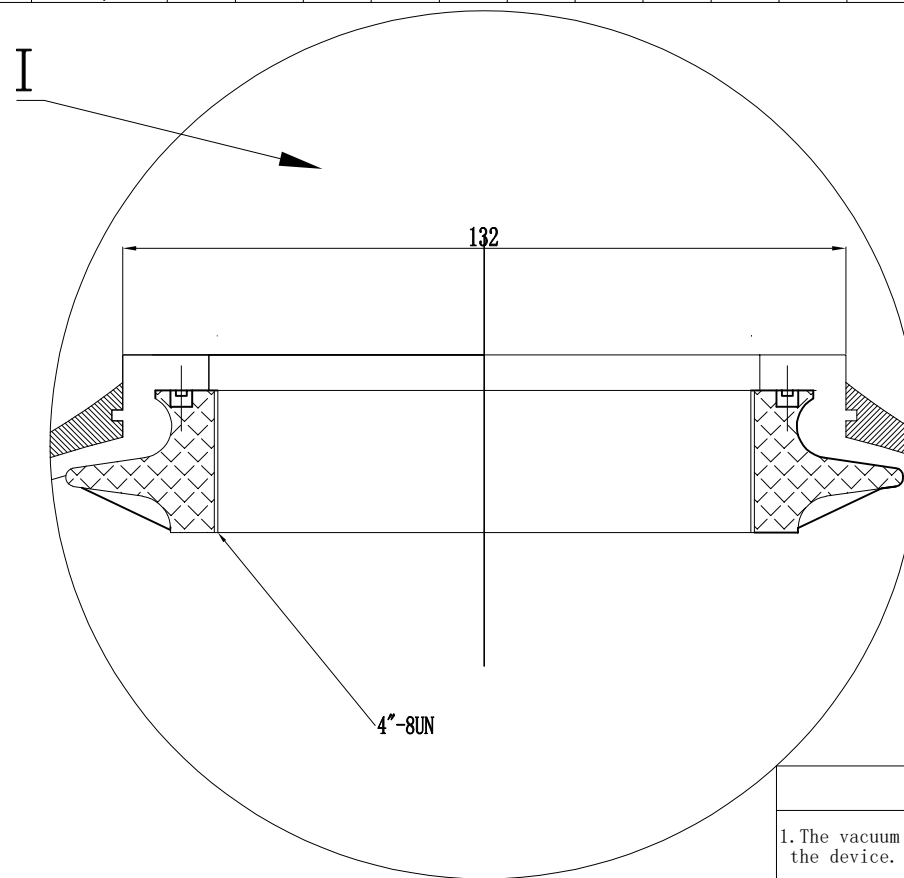

4"-8UN internal thread	
Middle Dia	3.918-3.930"
Min Dia	3.865-3.875"
Max Dia	4.000-4.010"

Note:

- The vacuum valve must be installed on the device.
- Operation Instructions
 - A. Max working pressure: 10.5Bar (150Psi)
 - B. Temperature Range: 1-50°C (34-127°F)
 - C. Maximum vacuum: 17Kpa (5" Hg)

Remark
 1. Product type identification see outer packaging logo.
 2. The product color is consistent with the color of the tape packaging box.

Sign			Hebei Chengda WaterTechnology Co., Ltd.			
Designer	Signature Chengyang Sun	2024. 7. 16	Material	FRP	Projection:	
Review	Jingwei Hu	2024. 7. 18	Model:	24", 4"T/B	Name: FRP tank	
Approve			Version number: 00	Description of Change Version:	Drawing No.: CD-22-09-28/56	
Please don't measure the size of the drawing.			Unit: mm		1 Page Page 1	