


Technical Parameters															
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±25	H1	H2	L	F	WA	WLA	WB	WLB		
30×65	4" T	616.4	765	764	1664	1639	1130	160	100	8.5	3.5	8.5	2.5	Round	47±4
30×72	4" T	696.1	765	764	1844	1819	1300	160	100	8.5	3.5	8.5	2.5	Round	56±4

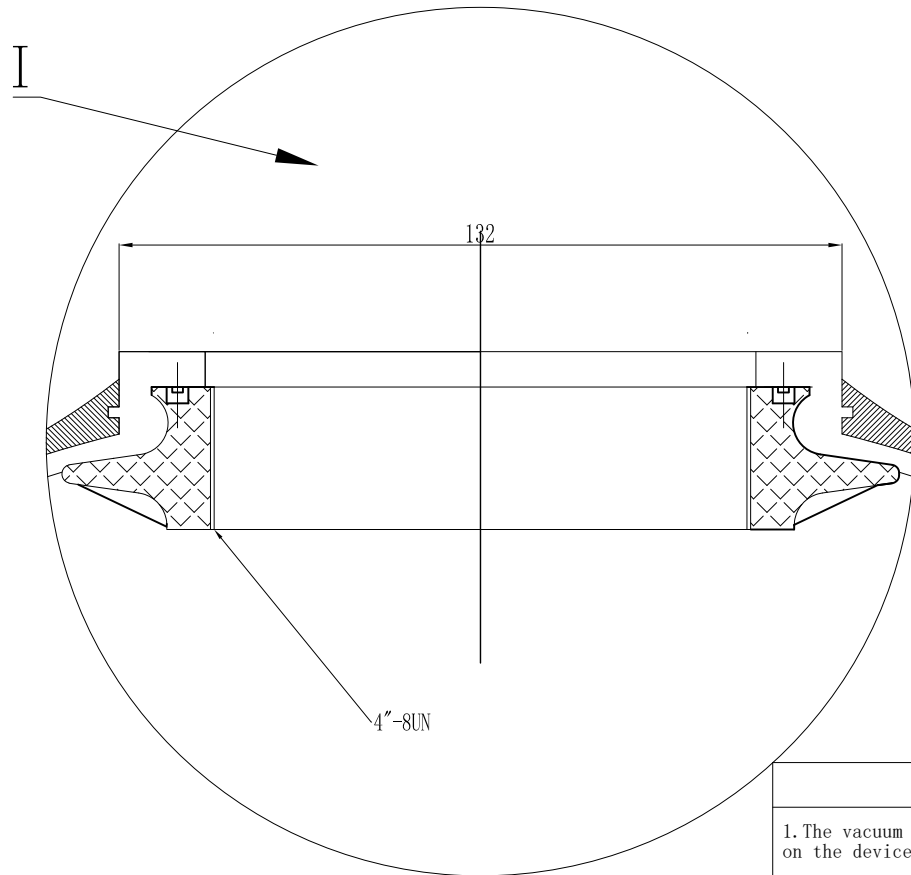

4"-8UN Internal thread	
Middle Dia	3.918-3.930"
Min Dia	3.865-3.875"
Max Dia	4.000-4.010"

**Note:**

- The vacuum valve must be installed on the device.
- Operation Instructions:
  - A. Max working pressure: 8Bar(125Psi)
  - B. Temperature Range: 1-50°C (34-127°F)
  - C. Maximum vacuum: 17Kpa (5"Hg)

**Remark**

- Product type identification see outer packaging logo.
- The product color is consistent with the color of the tape packaging box.

Sign			Hebei Chengda WaterTechnology Co.,Ltd.			
	Signature	Date	Material:	FRP	Projection:	⊥
Designer	Chengyang Sun	2024.07.18	Model:	30",4" T	Name:	FRP tank
Review	Jingwei Hu	2024.07.18	Version number:	00	Description of Change Version	Drawing No. CD-22-09-27/32
Approve			Please don't measure the size of the drawing		Unit: mm	1 Page Page 1