
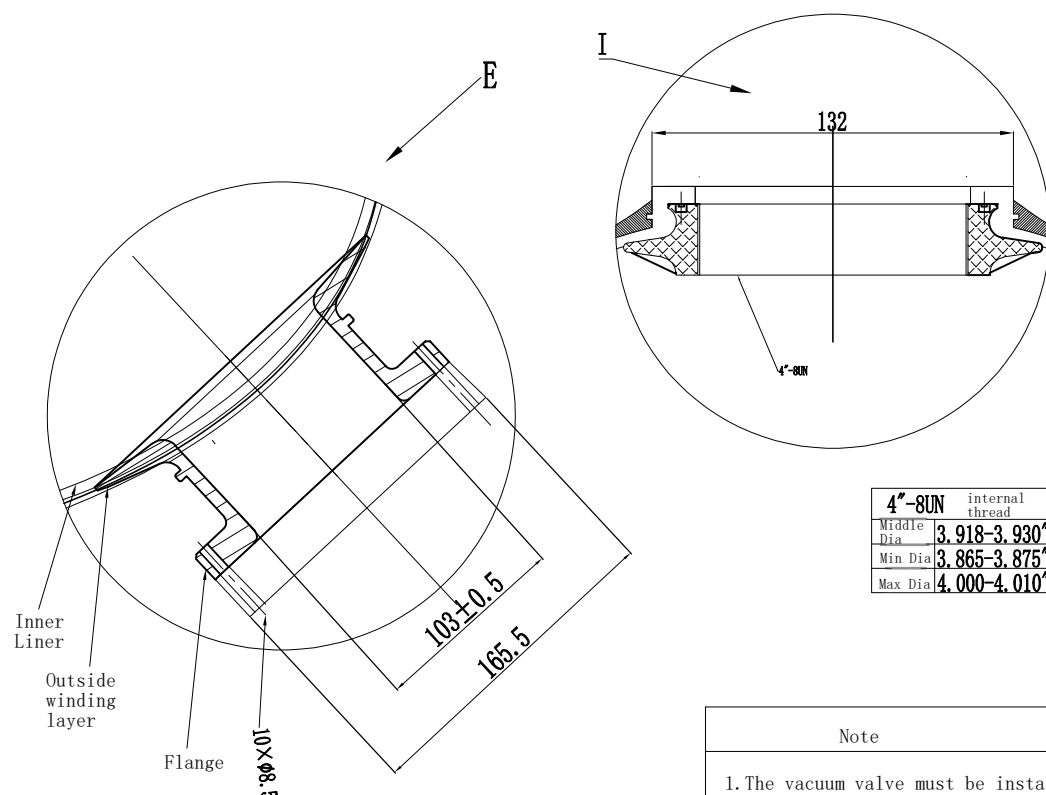


Technical Parameters

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±25	H1	H2	L	F	WA	WLA	WB	WLB		
30×65	3065-4-4-D	616.4	763	750	1855	1615	1130	315	100	10	5	8.5	3	Triangular	59±4
30×72	3072-4-4-D	696.1	763	750	2035	1795	1300	315	100	10	5	8.5	3	Triangular	62±4

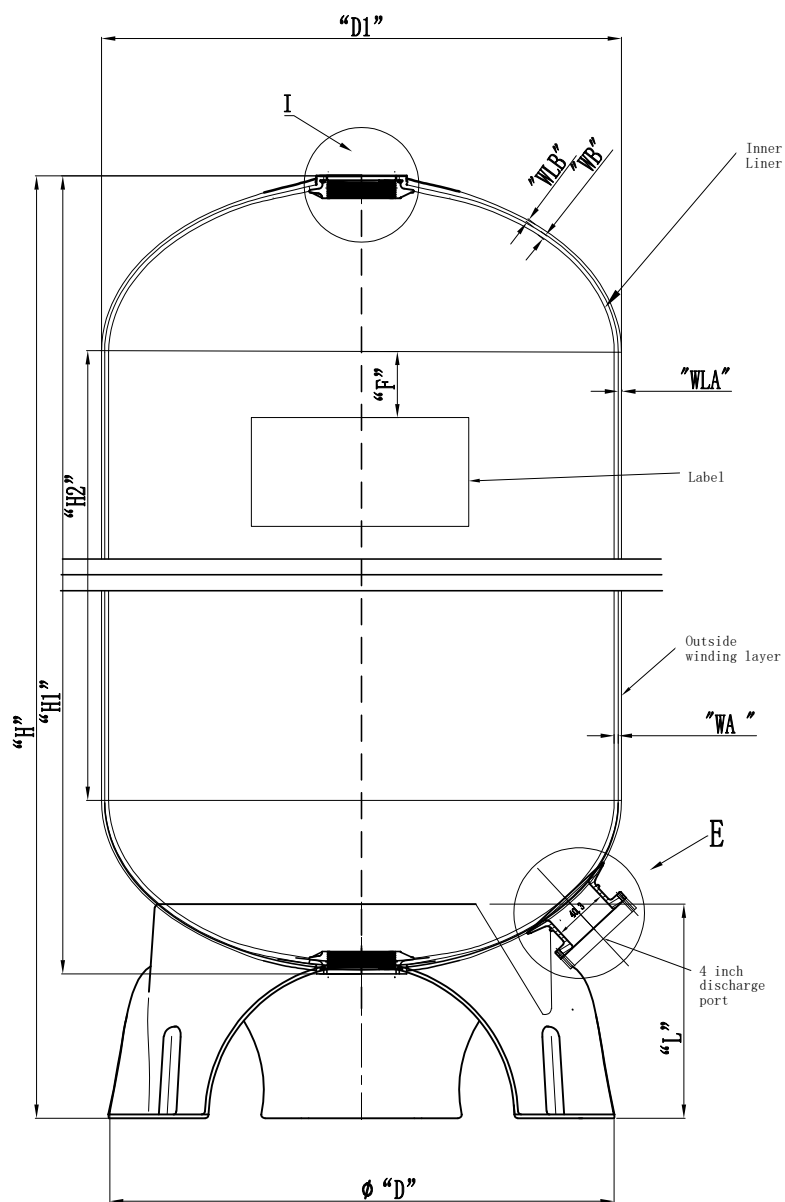

4"-8UN	internal thread
Middle Dia	3.918-3.930"
Min Dia	3.865-3.875"
Max Dia	4.000-4.010"

Note

- The vacuum valve must be installed on the device.
- Operation Instructions
  - A. Max working pressure: 8bar (125Psi)
  - B. Temperature Range: 1-50°C (34-127°F)
  - C. Maximum vacuum: 17Kpa (5" Hg)

Remark

- Product type identification see outer packaging logo.
- The product color is consistent with the color of the tape packaging box.

Sign		Hebei Chengda WaterTechnology Co., Ltd.		
Designer	Signature: Chengyang Sun Date: 2024. 7. 16	Material	FRP	Projection
Review	Signature: Jingwei Hu Date: 2024. 7. 18	Model	30" up and down 4" with 4" discharge port	Name: FRP tank
Approve		Version number: 00	Description of Change Version	Drawing No. CD-22-09-27/01
Please don't measure the size of the drawing		Unit: mm	1 Page Page 1	