
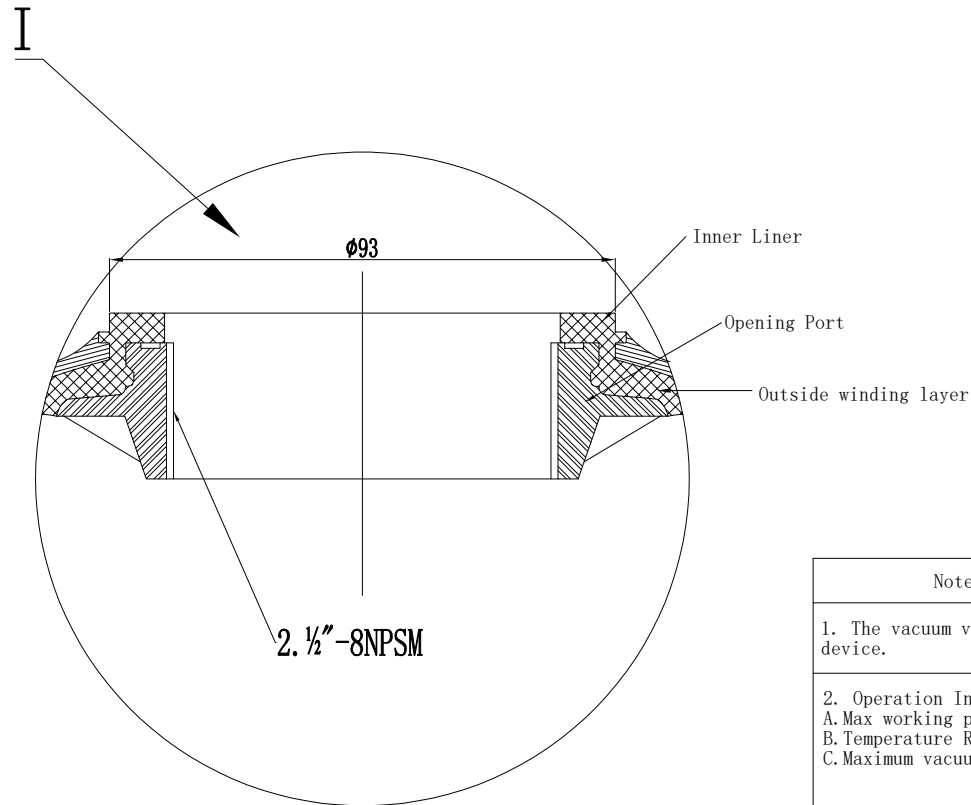


Technical Parameters

Model	Opening Size	(Ltrs.)	Size Parameters (mm)								Base	Weight (kg)
			D1	H1	H2	F	WA	WLB	WB	WLA		
8×13	T 2.5"	8.0	206	333	178	10	5	2	5	1	None	1.5±0.1
8×17	T 2.5"	11.0	206	432	277	50	5	2	5	1	None	1.7±0.2
8×24	T 2.5"	16.8	206	620	465	100	5	2	5	1	None	2.8±0.2
8×35	T 2.5"	25.2	206	880	725	100	5	2	5	1	None	3±0.3
8×44	T 2.5"	32.5	206	1120	965	100	5	2	5	1	None	3.8±0.3

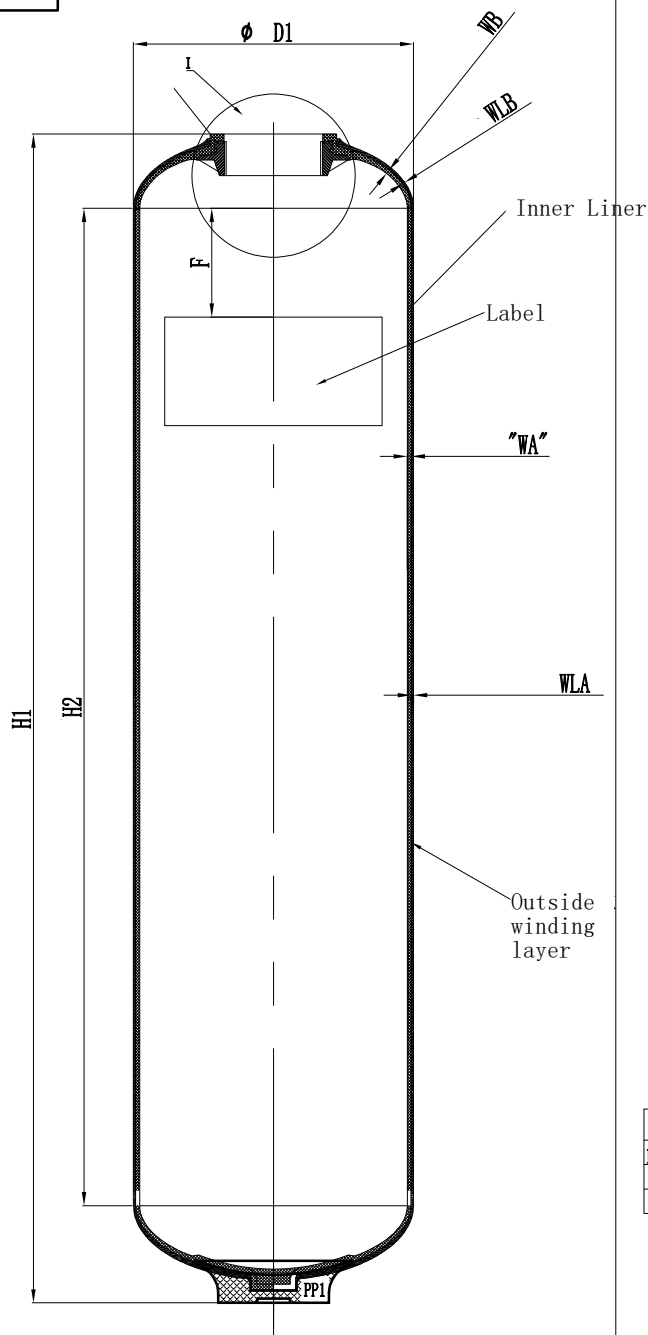

½-8NPSM internal thread	
Middle Dia	2.762-2.768"
Min Dia	2.705-2.715"
Max Dia	2.843-2.849"

Remark  
 1. Product type identification see outer packaging logo.  
 2. The product color is consistent with the color of the tape packaging box.

Note

- The vacuum valve must be installed on the device.
- Operation Instructions:  
 A. Max working pressure:10.5bar(150Psi)  
 B. Temperature Range:1-50°C (34-127°F)  
 C. Maximum vacuum:17Kpa (5"Hg)

Sign			Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material	FRP	Projection:	
Designer	Chengyang Sun	2024.7.16	Model	8" T 2.5"	Name: FRP tank	
Review	Jingwei Hu	2024.7.18	Version number:00	Description of Change Version	Drawing No. CD-22-09-28/12	
Approve			Please don't measure the size of the drawing		Unit: mm	
					1 Page Page 1	